

JAPANESE PATENT OFFICE
PATENT JOURNAL (A)
KOKAI PATENT APPLICATION NO. HEI 8[1996]-149583

Int. Cl. ⁶ :	H 04 Q 9/00 G 05 B 23/02 G 06 F 11/22 15/21 17/60
Sequence No. for Office Use:	7618-3H
Filing No.:	Hei 6[1994]-286832
Filing Date:	November 21, 1994
Publication Date:	June 7, 1996
No. of Claims:	5 (Total of 10 pages; OL)
Examination Request:	Not filed

PROCESS CONTROLLER AND DATA MONITORING METHOD

Inventor:	Shinichi Hiramatsu Control Works, Mitsubishi Electric Corp. 1-1-2 Wadasaki-cho, Hyogo-ku, Kobe-shi
Applicant:	000006013 Mitsubishi Electric Corp. 2-2-3 Marunouchi, Chiyoda-ku, Tokyo
Agent:	Junichi Miyasono, patent attorney

[There are no amendments to this patent.]


Abstract

Objective

To provide a process controller that can prevent the occurrence of problems, simplify maintenance inspection, and shorten inspection time by automatically monitoring the replacement periods of the constituent parts with a service life of the process controller.

Constitution

The use start dates and replacement periods of the constituent parts with a service life of the process controller are set by setting switch (9) and are displayed on use start date display unit (4) and replacement period display unit (6), respectively. The operating period from the use start date to the current date is calculated with calculating means (15a) and displayed on operating period display unit (5). If the operating period exceeds the replacement period, a warning signal is output from warning signal output means (15b).

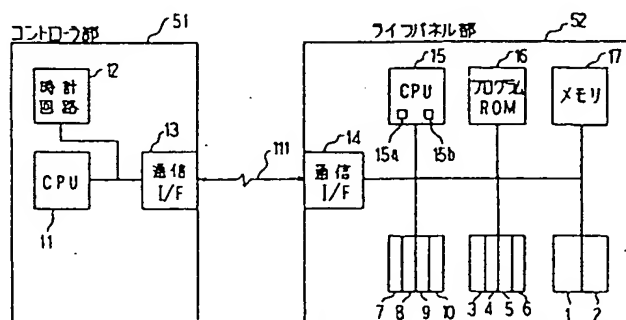

1: 部品選択表示器, 2: 部品寿命警告表示器, 3: 現在日表示器, 4: 使用開始日表示器, 5: 稼働期間表示器, 6: 交換周期表示器, 7: 部品選択スイッチ, 8: 設定項目選択スイッチ, 9: 設定スイッチ, 10: 設定データ変更スイッチ, 15a: 計算手段, 15b: 警告信号出力手段, 111: 通信線

- Key:
- 1 Part selection display unit
 - 2 Part's service life expiration warning display unit
 - 3 Current date replacement period
 - 4 Use start date display unit
 - 5 Operating period display unit
 - 6 Replacement period display unit
 - 7 Part selection switch
 - 8 Set item selection switch
 - 9 Setting switch
 - 10 Set data changing switch
 - 12 Clock circuit
 - 13, 14 Communication I/F
 - 15a Calculating means
 - 15b Warning signal output means
 - 16 Program ROM
 - 17 Memory

51	Controller part
52	Life panel part
111	Communication line

Claims

1. A process controller characterized by the fact that the process controller used for controlling control objects is equipped with a means that can set the use start dates and the replacement periods of the constituent parts with a service life, a calculating means that is used calculate the operating period from the aforementioned use start date to the current date, a warning signal output means that can output a warning signal when the aforementioned operating period exceeds the replacement period, and a part's life data display means that displays the aforementioned use start date, operating period, replacement period, and other part's life data.

2. A data monitoring method with which a process controller used for controlling control objects is connected to a host man-machine monitoring device so that the part's life data generated in the aforementioned process controller can be monitored with the aforementioned man-machine monitoring device.

3. A data monitoring method with which a process controller used for controlling control objects is connected to a telephone line so that the part's life data generated in the aforementioned process controller can be monitored with a telephone or a facsimile machine.

4. A data monitoring method with which a process controller used for controlling control objects is connected to a programming tool so that the part's life data generated in the aforementioned process controller can be monitored with the aforementioned programming tool.

5. A process controller characterized by the fact that the process controller used for controlling control objects is equipped with a means that can set the use start dates and the replacement periods of the constituent parts with a service life, a calculating means that is used calculate the operating period from the aforementioned use start date to the current date, a warning signal output means that can output a warning signal when the aforementioned operating period exceeds the replacement period, a part's life data display means that displays the aforementioned use start date, operating period, replacement period, and other part's life data, and a part replacement history list file that stores the aforementioned part's life data.

Detailed explanation of the invention

[0001]

Industrial application field

The present invention pertains to a process controller and a data monitoring method that can be applied to a control instrumentation system used for controlling printing, etc.

[0002]

Prior art

Figure 10 shows a monitor panel for displaying the operating status of a conventional process controller in an instrumentation control system to the operator according to the Maintenance Inspection Summary of Mitsubishi General Instrumentation Control System MACTUS530 (IB-62527-A, published in June 1993). Figure 11 is a schematic oblique view of the process controller. In Figure 10, (25)-(29) represent LED display units for displaying the operating status of the process controller. More specifically, (25) represents a serious problem LED display unit; (26) represents a light problem LED display unit; (27) represents a CPU power supply abnormality LED display unit; (28) represents an I/O power supply abnormality LED display unit; and (29) represents a low-battery LED display unit. (30) is a logic diagram illustrating the cause of the serious problems, and (31) is a logic diagram illustrating the cause of the light problems.

[0003]

The operation will be explained below. The operator of the process controller determines whether the instrumentation control system works properly or is experiencing some problems by monitoring serious problem LED display unit (25) and light problem LED display unit (26). Each of LED display units (25)-(29) is turned on when the system works properly and is turned off when an abnormality occurs.

[0004]

When serious problem LED display unit (25) is turned off, it means that a serious problem occurs in the process controller. Subsequently, the cause of the serious problem is traced by using logic diagram (30), and the abnormal part is specified. For example, if CPU power supply abnormality LED display unit (27) and I/O power supply abnormality LED display unit (28) are turned off, it means that the abnormal parts are the CPU power supply and I/O power supply where the serious problem of the system occurs. Then, the process controller is stopped, and the broken CPU power supply and I/O power supply are replaced to recover the instrumentation control system.

[0005]

Similarly, if light problem LED display unit (26) is turned off, it means that a light problem occurs in the process controller. The cause of the light problem is traced by using logic diagram (31), and the abnormal part is specified. For example, if low-battery LED display unit (29) is turned off, it becomes necessary to replace the battery with a new one because the battery power is low.

[0006]

Problems to be solved by the invention

Since the monitor panel of the conventional process controller has the aforementioned configuration, it is possible to determine whether each part is normal or abnormal. However, it is impossible to determine whether a part has reached its service life limit and needs to be replaced by simply observing the monitor panel. The operator must prepare a part replacement table periodically and confirms the part replacement period according to this table. This is inconvenient.

[0007]

The purpose of the present invention is to solve the aforementioned problem by providing a process controller that can prevent the occurrence of problems, simplify maintenance inspection, and shorten inspection time by automatically monitoring the replacement periods of the parts of the process controller with a service life.

[0008]

Means to solve the problems

The process controller disclosed in the first part of the present invention is equipped with a setting means (setting switch (9)) that can set the use start dates and the replacement periods of the constituent parts with a service life, a calculating means (15a) that is used calculate the operating period from the aforementioned use start date to the current date, a warning signal output means (15b) that can output a warning signal when the aforementioned operating period exceeds the replacement period, and part's life data display means (use start date display unit (4), operating period display unit (5), and replacement period display unit (6)) which displays the aforementioned use start date, operating period, replacement period, and other part's life data.

[0009]

The data monitoring method disclosed in the second part of the present invention is characterized by the fact that a process controller P used for controlling control objects is connected to a host man-machine monitoring device (18) so that the part's life data generated in the aforementioned process controller P can be monitored with said man-machine monitoring device (18).

[0010]

The data monitoring method disclosed in the third part of the present invention is characterized by the fact that a process controller P used for controlling control objects is connected to a telephone line (95) so that the part's life data generated in the aforementioned process controller P can be monitored with a telephone (92) or a facsimile machine (93).

[0011]

The data monitoring method disclosed in the fourth part of the present invention is characterized by the fact that a process controller P used for controlling control objects is connected to a programming tool (20) so that the part's life data generated in the aforementioned process controller P can be monitored with said programming tool (20).

[0012]

The process controller disclosed in the fifth part of the present invention is equipped with a setting means (setting switch (9)) that can set the use start dates and the replacement periods of the constituent parts with a service life, a calculating means (15a) that is used calculate the operating period from the aforementioned use start date to the current date, a warning signal output means (15b) that can output a warning signal when the aforementioned operating period exceeds the replacement period, a part's life data display means (use start date display unit (4), operating period display unit (5), and replacement period display unit (6)) that displays the aforementioned use start date, operating period, replacement period, and other part's life data, and a part replacement history list file (23) that stores the aforementioned part's life data.

[0013]

Operation

For the process controller disclosed in the first part of the present invention, the use start dates and replacement periods of the constituent parts with a service life are set by setting means (setting switch (9)), and the operating periods from the use start dates to the current date are calculated with calculating means (15a). Also, the use start dates, replacement periods, and

operating periods are displayed on the part's life data display means (use start date display unit (4), replacement period display unit (6), and operating period display unit (5)). If the operating period exceeds the replacement period, a warning signal will be output from warning signal output means (15b).

[0014]

In the data monitoring method disclosed in the second part of the present invention, the part's life data generated by process controller P are sent to host man-machine monitoring device (18) so that they can be monitored by host man-machine monitoring device (18).

[0015]

In the data monitoring method disclosed in the third part of the present invention, the part's life data generated by process controller P are sent to telephone (92) or facsimile machine (93) through a telephone line (95). In this way, the part's life data can be monitored with telephone (92) or facsimile machine (93).

[0016]

In the data monitoring method disclosed in the fourth part of the present invention, part's life data generated by process controller P are sent to programming tool (20) so that they can be monitored by programming tool (20).

[0017]

For the process controller disclosed in the fifth part of the present invention, the use start dates and replacement periods of the constituent parts with a service life are set by setting means (setting switch (9)), and the operating periods from the use start dates to the current date are calculated with calculating means (15a). Also, the use start dates, replacement periods, and operating periods are displayed on the part's life data display means (use start date display unit (4), replacement period display unit (6), and operating period display unit (5)). If the operating period exceeds the replacement period, a warning signal will be output from warning signal output means (15b). Also, the part's life data are stored in part replacement history list file (23).

[0018]

Application examples

Application Example 1

In the following, Application Example 1 of the present invention will be explained with reference to the figures. Figure 1 is a block diagram illustrating the configuration of the process

controller disclosed in Application Example 1 of the present invention. In Figure 1, controller part (51) is equipped with CPU (11), clock circuit (12), and communication interface (communication I/F) (13). Service life panel part (52) is equipped with communication interface (14), CPU (15), program ROM (16), memory (17), part selection display unit (1), part's service life expiration warning display unit (2), current date display unit (3), use start date display unit (part's life data display means) (4), operating period display unit (part's life data display means) (5), replacement period display unit (part's life data display means) (6), part selecting switch (7), set item selecting switch (8), setting switch (setting means) (9), and set data changing switch (10). Said display units (1) and (2) are realized with LED, while said display units (3)-(6) are realized with English numeral LEDs. Controller part (51) and life panel part (52) are connected to each other via communication line (111). Setting switch (9) in said life panel part (52) is a setting means that can set the use start dates and replacement periods of the parts with a service life, such as power supply device, fan, filter, and battery (not shown in the figure) in the process controller. CPU (15) is equipped with calculating means (15a), which calculates the operating period of each part from the use start date to the current date, and warning signal output means (15b) which can output a warning signal if the aforementioned operating period exceeds the replacement period. Figure 2 is a schematic diagram illustrating the appearance of display panel (53) on said life panel part (52). As described above, display panel (53) is equipped with part selection display unit (1), part's service life expiration warning display unit (2), current display unit (3), use start date display unit (4), operating period display unit (5), replacement period display unit (6), part selecting switch (7), set item selecting switch (8), setting switch (9), and set data changing switch (10).

[0019]

CPU (15) in life panel part (52) shown in Figure 1 controls part selection display unit (1), part's service life expiration warning display unit (2), current display unit (3), use start date display unit (4), operating period display unit (5), replacement period display unit (6), part selecting switch (7), set item selecting switch (8), setting switch (9), and set data changing switch (10). Program ROM (16) stores a program used for the control of CPU (15). Memory (17) stores the use start dates, operating periods, replacement period, etc. of the parts. In order to recognize the current date, life panel part (52) communicates with CPU (11) of controller part (51) via communication interfaces (13) and (14) and communication line (111) and reads out the time of clock circuit (12) of controller part (51).

[0020]

The display contents and the operating method of display panel (53) shown in Figure 2 will be explained below. In the process controller, the parts whose service lives are to be confirmed are selected by part selecting switch (7). At present, the corresponding part selection display units (1) are turned on in accordance with the parts selected. The use start date and operating period of each part are displayed on use start date display unit (4) and operating period display unit (5). The operating period displayed on operating period display unit (5) is obtained by subtracting the use start date displayed on use start date display unit (4) from the current date displayed on current date display unit (3). Thus, it is possible to confirm how long the part has been used. Also, the replacement period of the part is displayed on replacement period display unit (6). According to the contents of operating period display unit (5) and replacement period display unit (6), it is possible to confirm how much longer the part can be used. The operating period is calculated by operating period calculating means (15a). If the operating period displayed on operating period display unit (5) exceeds the replacement period displayed on replacement period display unit (6), it means that it is time to replace the part. The part's service life expiration warning display unit (2) is turned on with a warning signal sent from warning signal output means (15b) to inform the operator that it is time to replace the part. The contents of current date display unit (3), use start date display unit (4), and replacement period display unit (6) can be changed on the life display panel. To change the display contents, the items to be changed are first selected by set item selecting switch (8). Then, the values of the data are changed with set data changing switch (10). After the changes are made, the changed contents are registered by pressing setting switch (9).

[0021]

The operation of CPU (15) of life panel part (52) will be explained below with reference to the flow chart shown in Figures 3-5. First, the flow chart of Figure 3 shows the display processing of part's service life expiration warning display unit (2). CPU (15) of life panel part (52) reads out the time of clock circuit (12) in controller part (51) through communication interface (14) to recognize the current date (step ST1). Then, the use start date is read from memory (17) (step ST2). The use start date is subtracted from the current date to calculate the operating period which is then stored in memory (17) (step ST3). The replacement period is then read from memory (17) and compared with the operating period (step ST4). If the operating period exceeds the replacement period, part's service life expiration warning display unit (2) is turned on (step ST5). The process from step ST2 to step ST5 is carried out for all of the parts (step ST6).

[0022]

Subsequently, the flow chart of Figure 4 shows the set changing process for the current date, use start date, and replacement period. First, it is confirmed whether the current has been changed (step ST7). If there is a change, time (12) of clock circuit (12) in controller part (51) is corrected (step ST8). Then, the part selected by part selecting switch (7) is recognized (step ST9). It is then confirmed whether the use start date and replacement period are changed (step ST10 and ST12). If they are changed, the contents concerned with the use start date and replacement period stored in memory (17) are changed (step ST11 and step ST13).

[0023]

Subsequently, the flow chart of Figure 5 shows the display processing of each of display units (3)-(6). Current data display unit (3) reads out and displays the time of time clock (12) in controller part (51) (step ST14). After the part selected by part selecting switch (7) is recognized (step ST15), the use start date, operating period, and replacement period are displayed on use start date display unit (4), operating period display unit (5), and replacement period display unit (6) by reading the contents of the corresponding part from memory (17) (step ST16).

[0024]

Application Example 2

In said Application Example 1, display panel (53) comprises display units (1) and (2) made up of LED, display units (3)-(6) made of English numeral LEDs, and switches (7)-(10). In Application Example 2, however, as shown in Figure 6, it is also possible to use liquid-crystal touch panel display device (61). In this way, the device can be further miniaturized, while the same effect as that of said Application Example 1 can be realized.

[0025]

Application Example 3

In said Application Examples 1 and 2, the life panel part of the process controller must be operated by an operator to confirm the service lives of the parts. However, as shown in Figure 7, the life data of each part stored in the life panel part can also be displayed on a host man-machine monitoring device (18) via a system bus (71) to confirm the status of the parts with a service life for each of process controllers P1-Pn. It is also possible to use a telephone line (74) to automatically ring a telephone (72) or to use a FAX (facsimile) machine (19) at the permanent address of the operator when the service life of a part expires. In this way, the parts of process controllers P1-Pn with a service life can be monitored remotely. It is also possible to connect process controllers P1-Pn to a programming tool (20) to display the service life data via

communication interface (75). In this way, process controllers P1-Pn can be monitored while they are being adjusted.

[0026]

Application Example 4

In said Application Examples 1, 2, and 3, only service lives are displayed. As described in Application Example 4, however, the part replacement history can be printed out with a printer, which is connected to a host man-machine monitoring device or a programming tool, and stored as a document.

[0027]

Figure 8 is a block diagram illustrating the configuration of a system including a process controller disclosed in Application Example 4 of the present invention. In Figure 8, the same reference numbers are assigned to the parts equivalent to those shown in Figure 1, respectively, and the explanation for these parts is omitted. In Figure 8, controller part (51) of process controller P is also equipped with part replacement history file (23) which stores the part's life data generated in life panel part (52), system bus interface (82) which acts as the interface with host man-machine monitoring device (18), telephone line interface (81) which acts as the interface with telephone line (95) connected to telephone (92) or facsimile machine (93), and programming tool interface (83) which acts as the interface with programming tool (20) in addition to CPU (11), clock circuit (12), and communication interface (13) which are also used in Application Example 1. Host man-machine monitoring device (18) is equipped with system bus interface (84) which acts as the interface with controller part (51), part replacement history file (24) which stores the part's life data sent from controller part (51), CRT interface (86) which acts as the interface with CRT (90), keyboard interface (87) which acts as the interface with keyboard (91), printer interface (88) which acts as the interface with printer (21), and CPU (85) which controls the aforementioned constituent elements. Host man-machine monitoring device (18) and controller part (51) are connected via system bus (94). Printer (22) is connected to programming tool (20).

[0028]

The operation will be explained below. The part replacement contents generated in life panel part (52) are stored as a part replacement history list, such as the one shown in Figure 9, in part replacement history file (23) in controller part (51) through communication interface (14), communication line (111), and communication interface (13). The part's life data are also stored as a part replacement history list in part replacement history file (24) of host man-machine

monitoring device (18) through system bus interface (82), system bus (94), and system bus interface (84). When the part's life data stored in part replacement history file (23) of controller part (51) are sent to programming tool (20), the part replacement history list can be printed by printer (22) and output. Also, when the part's life data are sent to telephone (92), an alarm can be generated. When the part's life data are sent to facsimile machine (93), the replacement history list can be printed and output. When the part's life data stored in part replacement history file (24) of host man-machine monitoring device (18) are sent to printer (21), the part replacement history list can be printed and output. Since the content of part replacement history file (24) is displayed on CRT (90), the content can be amended by operating keyboard (91). Since the part replacement history list used in Application Example 4 can be generated automatically, the maintenance inspection performed by the operator can be simplified, and the time can be shortened.

[0029]

Effects of the invention

As explained above, the process controller disclosed in the first part of the present invention is equipped with a setting means which can set the use start dates and replacement periods of the constituent parts with a service life, a calculating means that can calculate the operating period from the use start date to the current date, a warning signal output means that can output a warning signal when the aforementioned operating period exceeds the replacement period, and a part's life data display means which can display the aforementioned use start dates, operating periods, replacement period, and other part's life data. Consequently, the times for replacing the parts of the process controller with a service life can be detected automatically and confirmed easily. In this way, the problems can be prevented before they occur. Also, the maintenance inspection operation can be simplified, and the inspection time can be shortened.

[0030]

According to the second part of the present invention, a process controller used for controlling control objects is connected to a host man-machine monitoring device so that the part's life data generated in the aforementioned process controller can be monitored by the aforementioned man-machine monitoring device. Consequently, the times for replacing the parts of the process controller with a service life can be monitored from a central monitoring room. In this way, problems can be prevented before they occur. Also, the maintenance inspection operation can be simplified, and the inspection time can be shortened.

[0031]

According to the third part of the present invention, a process controller used for controlling control objects is connected to a telephone line so that the part's life data generated in the aforementioned process controller can be monitored via telephone or a facsimile machine. Consequently, the times for replacing the parts of the process controller with a service life can be monitored remotely. In this way, problems can be prevented before they occur. Also, maintenance inspection can be simplified, and the inspection time shortened.

[0032]

According to the fourth part of the present invention, a process controller used for controlling control objects is connected to a programming tool so that the part's life data generated in the aforementioned process controller can be monitored with the aforementioned programming tool. Consequently, the times for replacing the parts with a service life can be monitored while the process controller is being adjusted. In this way, problems can be prevented before they occur. Also, the maintenance inspection operation can be simplified and the inspection time shortened.

[0033]

The process controller disclosed in the fifth part of the present invention is also equipped with a part replacement history list file which stores the part's life data in addition to the setting means, calculating means, warning signal output means, and the part's life data display means of the process controller disclosed in the first part of the present invention. Consequently, the same effects as those of the first part of the present invention can be realized, and the part replacement history list can be output. In this way, the maintenance inspection operation can be further simplified and carried out in a shorter period of time.

Brief description of the figures

Figure 1 is a block diagram illustrating the configuration of the process controller disclosed in Application Example 1 of the present invention.

Figure 2 is a diagram illustrating the display panel used in Application Example 1.

Figure 3 is a flow chart illustrating the service life expiration warning output processing in Application Example 1.

Figure 4 is a flow chart illustrating the set changing processing in Application Example 1.

Figure 5 is a flow chart illustrating the panel display processing in Application Example 1.

Figure 6 is a diagram illustrating the appearance of the liquid-crystal touch panel display device disclosed in Application Example 2 of the present invention.

Figure 7 is a diagram illustrating a system including the process controller disclosed in Application Example 3 of the present invention.

Figure 8 is a block diagram illustrating the configuration of a system including the process controller disclosed in Application Example 4 of the present invention.

Figure 9 is a diagram illustrating the part replacement history list in Application Example 4.

Figure 10 is a diagram illustrating the monitor panel of a conventional process controller.

Figure 11 is a schematic oblique diagram illustrating a conventional process controller.

Explanation of symbols

1	Part selection display unit
2	Part's service life expiration warning display unit
3	Current date display unit
4	Use start date display unit (part's life data display means)
5	Operating period display unit (part's life data display means)
6	Replacement period display unit (part's life data display means)
7	Part selecting switch
8	Set item selecting switch
9	Setting switch (setting means)
10	Set data changing switch
11, 15, 85	CPUs
12	Clock circuit
13, 14, 75	Communication interfaces
16	Program ROM
17	Memory
18	Host man-machine monitoring device
20	Programming tool
21, 22	Printers
23, 24	Part replacement history files
25	Serious problem LED display unit
26	Light problem LED display unit
27	CPU power supply LED display unit
28	I/O power supply LED display unit
29	Low-battery LED display unit

30	Serious problem logic diagram
31	Light problem logic diagram
51	Controller part
52	Life panel part
53	Display panel
61	Liquid-crystal touch panel display device
P, P1, Pn	Process controllers
71, 94	System buses
72, 92	Telephones
73, 93	Facsimile machines
74	Telephone line
81	Telephone line interface
82, 84	System bus interfaces
83	Programming tool interface
86	CRT interface
87	Keyboard interface
88	Printer interface
90	CRT
91	Keyboard
111	Communication line

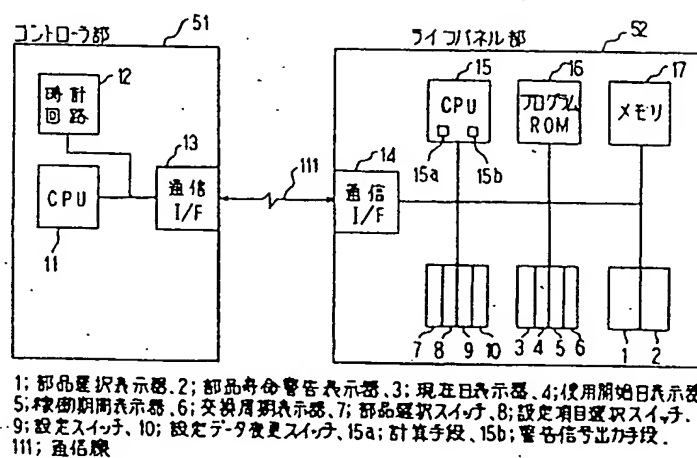


Figure 1

Key:	1	Part selection display unit
	2	Part's service life expiration warning display unit
	3	Current date replacement period
	4	Use start date display unit

- 5 Operating period display unit
- 6 Replacement period display unit
- 7 Part selection switch
- 8 Set item selection switch
- 9 Setting switch
- 10 Set data changing switch
- 12 Clock circuit
- 13, 14 Communication I/Fs
- 15a Calculating means
- 15b Warning signal output means
- 16 Program ROM
- 17 Memory
- 111 Communication line
- 51 Controller part
- 52 Life panel part

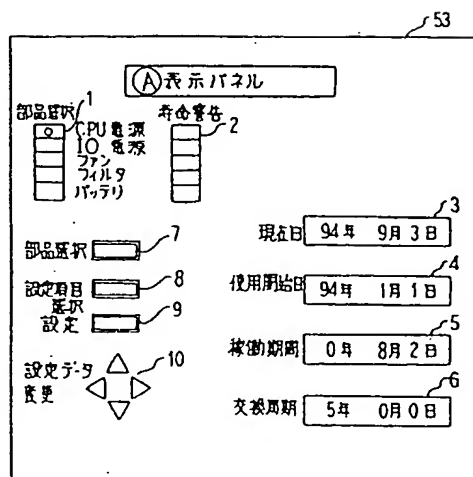


Figure 2

- Key: A Display panel
- 1 Part selection
 - CPU power supply
 - I/O power supply
 - Fan
 - Filter
 - Battery
 - 2 Service life expiration warning
 - 3 Current date: September 3, 1994
 - 4 Use start date: January 1, 1994
 - 5 Operating period: 8 months and 2 days
 - 6 Replacement period: 5 years
 - 7 Part selection
 - 8 Set item
 - 9 Setting

10 Set data change

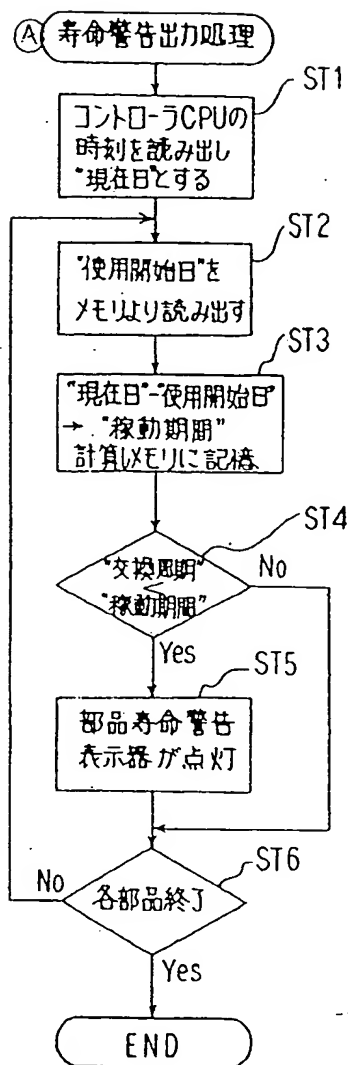


Figure 3

- Key: A Service life expiration warning output processing
- ST1 The time of the controller CPU is read out and taken as the "current date."
- ST2 The "use start date" is read out from the memory.
- ST3 "Current date" - "use start date" -> "operating period" is calculated and stored in the memory.
- ST4 "Replacement period" < "operating period"
- ST5 The part's service life expiration warning display unit is turned on.
- ST6 Completed for all the parts?

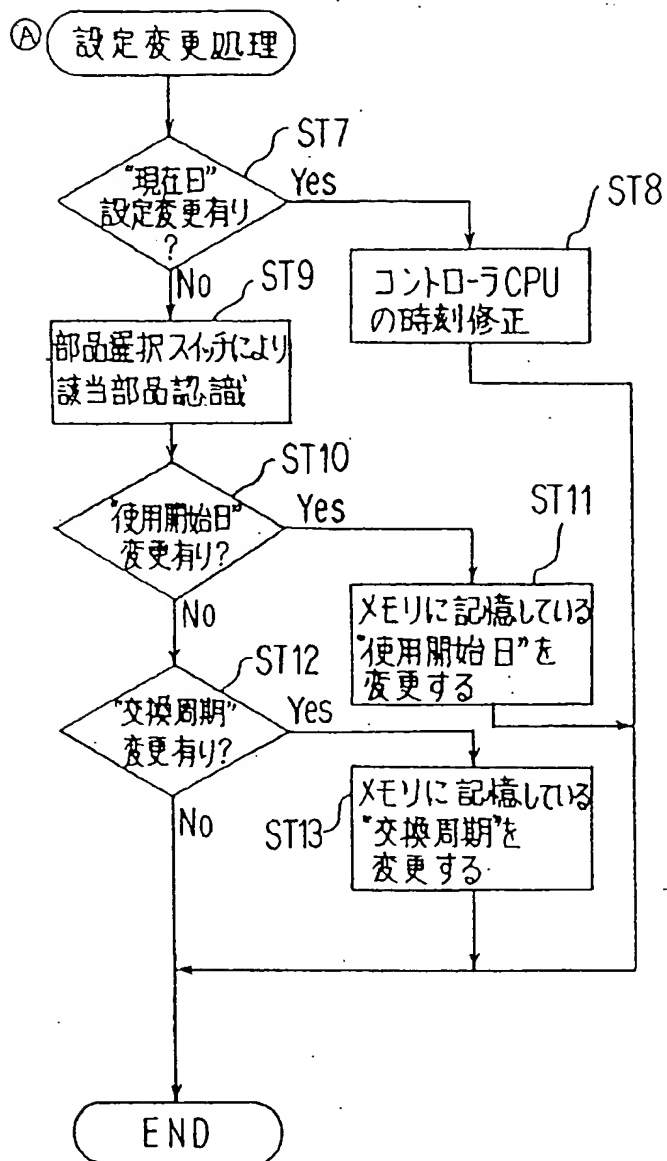


Figure 4

- Key:
- A Set changing processing
 - ST7 Is the "current date" changed?
 - ST8 Correct the time of the controller CPU
 - ST9 The corresponding part is recognized by the part selecting switch.
 - ST10 Is the "use start date" changed?
 - ST11 The "use start date" stored in the memory is changed.
 - ST12 Is the "replacement period" changed?
 - ST13 The "replacement period" stored in the memory is changed.

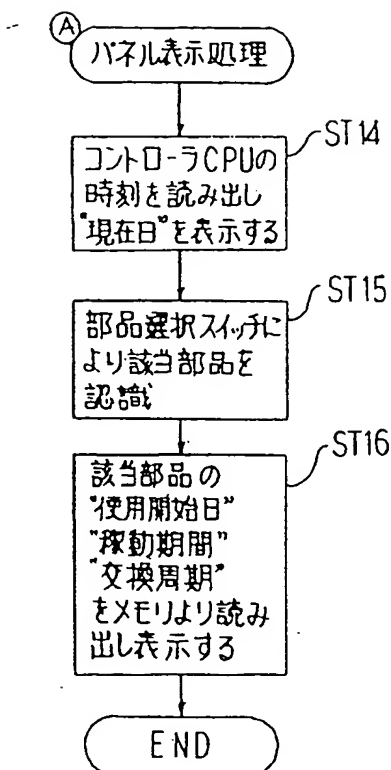


Figure 5

- Key: A Panel display processing
- ST14 The time of the controller CPU is read out, and the "current date" is displayed.
- ST15 The corresponding part is recognized by the part selecting switch.
- ST16 The "use start date," "operating period," and "replacement period" of the corresponding part are read out from the memory and displayed.




Figure 6

- Key: 1 Life picture
- 2 Item: CPU power supply
- 3 Current date: September 3, 1994
- 4 Use start date: January 1, 1994
- 5 Operating period: 8 months and 2 days
- 6 Replacement period: 5 years

- 7 Set Next item
61 Liquid-crystal touch panel display device

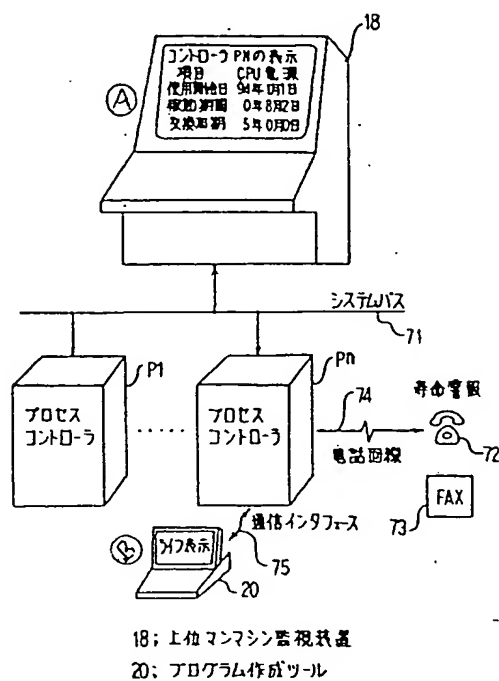


Figure 7

- Key: A Display of controller PN
Item: CPU power supply
Use start date: January 1, 1994
Operating period: 8 months and 2 days
Replacement period: 5 years
- B Life display
P1 Process controller
Pn Process controller
18 Host man-machine monitoring device
20 Programming tool
71 System bus
72 Service life warning
74 Telephone line
75 Communication interface

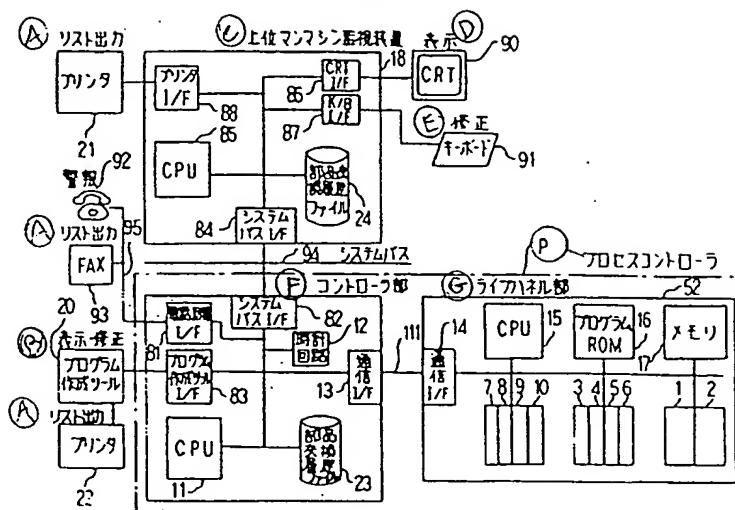


Figure 8

- Key:
- A List output
 - B Display/amendment
 - C Host man-machine monitoring device
 - D Display
 - E Amendment
 - F Controller part
 - G Life panel part
 - P Process controller
 - 12 Clock circuit
 - 13 Communication I/F
 - 14 Communication I/F
 - 16 Program ROM
 - 17 Memory
 - 20 Programming tool
 - 21 Printer
 - 22 Printer
 - 23 Part replacement history file
 - 24 Part replacement history file
 - 81 Telephone line I/F
 - 82 System bus I/F
 - 83 Programming tool I/F
 - 88 Printer I/F
 - 84 System bus I/F
 - 91 Keyboard
 - 92 Alarm
 - 94 System bus

① カピコントロラPn

② 部品交換履歴リスト

作成		調査		検認	

③ 交換日

④ 寿命部品

交換日	CPU電源	I/O電源	ファン	フィルター	バッテリー
89年4月1日	—	—	—	—	1
90年4月5日	—	—	1	1	2
91年4月15日	—	—	—	—	3
92年4月13日	—	—	2	2	4
93年4月2日	1	1	—	—	5
94年4月17日	—	—	3	3	6

⑤ 表中の数値は交換した回数の積算値、—は交換していないことを示す

Figure 9

- Key:
- 1 Process controller Pn
 - 2 Part replacement history list
 - 3 Preparation
 - 4 Verification
 - 5 Confirmation
 - 6 Replacement date
 - 7 April 1, 1989
 - 8 April 5, 1990
 - 9 April 15, 1991
 - 10 April 13, 1992
 - 11 April 2, 1993
 - 12 April 17, 1994
 - 13 Parts with a service life
 - 14 CPU power supply
 - 15 I/O power supply
 - 16 Fan
 - 17 Filter
 - 18 Battery
 - 19 The values in the table are the accumulated times of replacement, and—means no replacement is made.

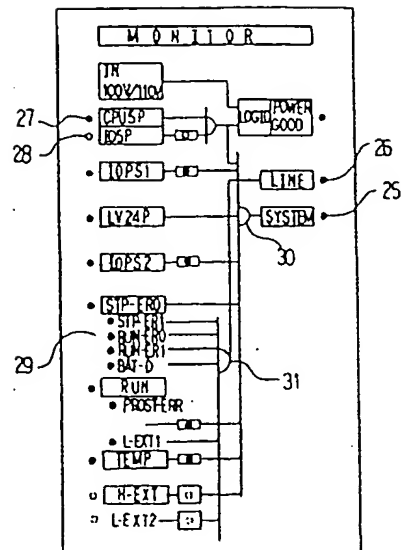


Figure 10




Figure 11

CEPT—A Computer-Aided Manufacturing Application for Managing Equipment Reliability and Availability in the Semiconductor Industry

p. 499 - 506

Prasad Rampalli, Member, IEEE, Arakere Ramesh, and Nimish Shah

Abstract—Historically, the semiconductor industry has been extremely capital intensive with terrible process equipment utilization rates. The industry is highly competitive and is continuously striving for faster device performance leading to rapidly shrinking (less than 1 μm) chip geometries. These rapid technology changes demand introduction of more accurate and high resolution equipment leading to escalated capital costs with low reliability. Net result: manufacturing cost containment becomes a challenge!

A comprehensive equipment performance management system becomes a vital tool to focus on opportunities to better utilize equipment in a competitive environment. Recognizing this need, Intel has embarked on an aggressive ten man-year computer system development and deployment effort to improve equipment utilization at all its manufacturing facilities. This article discusses the features of the equipment management system and the joint effort by Sematech and Intel to develop an equipment performance analysis system that lay the foundation for an industry-wide standard for the first time.

I. INTRODUCTION

IN THE 1970's, the semiconductor industry thrived on technological innovations. Since it was a growth industry, demand was ahead of supply. Most semiconductor companies ran their manufacturing shops akin to laboratories and enjoyed high profit margins. The situation today is quite different. To survive in the 1990's, semiconductor companies must reduce die manufacturing costs and strive for high product quality.

What are the impediments to meeting the goal of reduced die manufacturing costs? With wafer fabrication moving to submicrometer technology, the cost of the equipment has gone up considerably. Couple this with an inherently low equipment utilization rate and poor reliability in the industry, manufacturing cost reduction and quality improvement become major challenges.

In a complex manufacturing scenario, the use of a standard corporate wide equipment data acquisition and management system to improve reliability, availability, and maintainability of equipment is a definite competitive advantage. This paper

describes Intel's efforts to define, design, develop, and implement such a system. The equipment management system was layered on top of the computer-aided manufacturing (CAM) system, WORKSTREAMTM used in the company.

A key by-product of the equipment performance management system introduction is a vastly improved user interface to WORKSTREAM.

Application migration in a rapidly changing distributed architecture and integration with expert systems and station controllers is given a brief treatment.

II. PROJECT APPROACH

After establishing the need for an equipment performance management system, Intel analyzed two scenarios to determine the platform for development:

- 1) proliferate a "system"
- 2) layer the system on the CA

A total-cost model
Factors considered

- development
- pilot costs;
- proliferation cost
- product support
- short and long term architecture implications on the CAM system.

The model showed that the stand-alone system was 1.75 times costlier than an integrated layered application on the CAM system. This was primarily due to the high cost of productizing a stand-alone system and the associated support through its life cycle. The stand-alone system required development of a number of interfaces to other shop floor control applications. Production support for the stand-alone system was more as support personnel were needed for both the stand-alone system and the CAM system. Figs. 1 and 2 summarize the results of the total cost model.

III. COMPUTER-AIDED MANUFACTURING (CAM)

The primary purpose of earlier generation CAM systems was to provide a data base for managing work in process

TMWORKSTREAM is a product of Consilium Inc., Mountain View, CA.

Manuscript received July 1, 1990; revised April 3, 1991. This paper was presented at the Ninth International Electronic Manufacturing Technology Symposium, Washington, DC, October 1-3, 1990.

The authors are with the Intel Corporation, Chandler, AZ 85226.
IEEE Log Number 9101108.

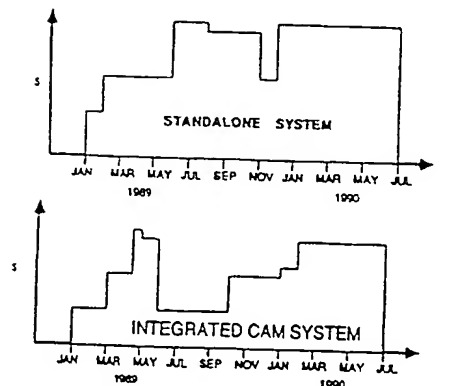


Fig. 1. Comparison of nonrecurring cost.

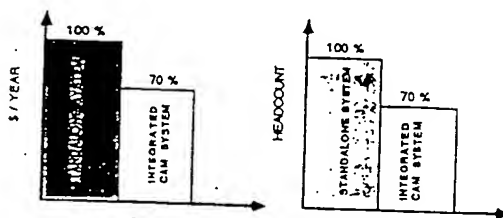


Fig. 2. Comparison of recurring cost.

(WIP). The CAM system provided engineers a window into the behavior of the manufacturing process. This was achieved via engineering data gathered at various steps of the manufacturing process. However, such a system solves only part of the problems associated with manufacturing. A comprehensive CAM system that can correlate WIP information with equipment data can provide the following benefits.

- Tracing yield losses to specific equipment.
- Tracking equipment performance (productive, idle, down).
- Ensuring that a proper recipe is being used on the machine, before a lot is processed to prevent misprocessing.
- Allowing only personnel trained on the specific equipment to process products.
- Preventing processing of products in the event of statistical process control violations of critical equipment parameters.
- Tracking equipment output (number of units processed).
- Scheduling preventive maintenance (PM) based on equipment usage (wafers processed, runs completed, etc.).

Fig. 3 illustrates the model of a typical CAM system. The model shows only the core modules of the system.

IV. REQUIREMENTS FOR AN EQUIPMENT MANAGEMENT SYSTEM

During the requirements definition phase, Intel reviewed the capabilities of local equipment management systems. Several equipment engineers at Intel facilities were interviewed. The study showed that the user community required the following key capabilities:

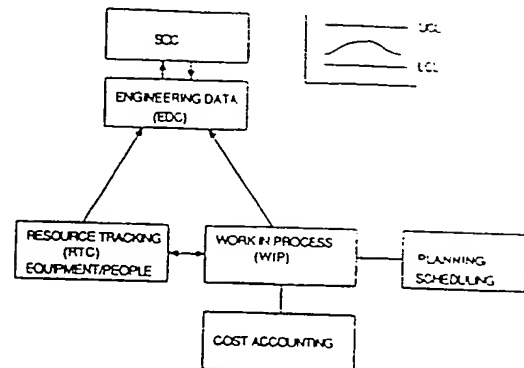


Fig. 3. Model of WORKSTREAM core modules.

- equipment failure/performance data collection;
- equipment monitor-data collection with capability to attach statistical process control charts;
- management of scheduled activity on equipment (example: PM);
- paper reduction through elimination of equipment communication log books, data collection forms, etc.;
- paperless tool to manage statistical process control rule violations;
- user friendly module to analyze equipment failure/performance data (MTBF, MTTR, MWBF, etc.).

Four new modules were integrated into WORKSTREAM to meet the requirements of a corporate wide equipment management system. Several enhancements to the standard WORKSTREAM modules were implemented. Also, an equipment performance analysis module was developed.

Fig. 4 shows an overview of the equipment performance management system model. The following are the four new modules integrated into WORKSTREAM.

- 1) The custom data collection (CDC) module helps to gather equipment failure data in a structured manner and also provides a friendly user interface to gather equipment monitor data.
- 2) PM-checklist data collection module allows the user to collect checklist data during preventive maintenance.
- 3) The schedule-messages module displays warning messages to the user on upcoming scheduled activities.
- 4) The alarm-management module allows the user to manage statistical process control rule violations.

V. EQUIPMENT FAILURE/MONITOR DATA

To perform reliability analysis, any equipment reliability improvement system must provide a structured mechanism for collecting repair/breakdown information. Also, the system should allow the operators/technicians to enter raw data and automatically perform complex calculations based on user defined formulas.

The CDC module allows equipment engineers to define equipment in terms of its subsystem and sub-subsystem as illustrated in Fig. 5. Verbs are defined describing the action taken by technicians to rectify a failure. Breakup of the

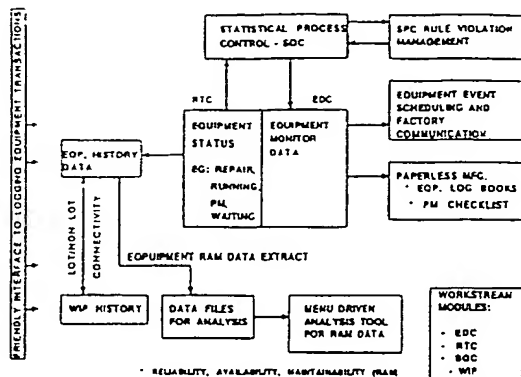


Fig. 4. Equipment performance/failure management overview model.

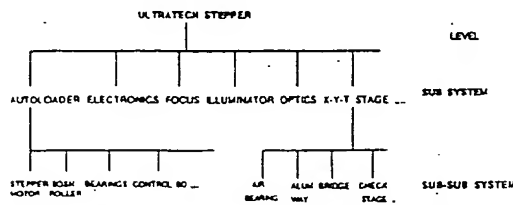


Fig. 5. Equipment classification for failure data collection.

equipment is stored in a table, which is part of the general table system (GTS) in WORKSTREAM.

How does one gather equipment failure data? When a technician logs a transaction at the completion of a repair, three screens are displayed in sequence. In the first screen, the technician makes a choice from a list of action verbs. In the second and third screen, the technician selects the subsystem (Autoloader, etc.) and the sub-subsystem (Bearing, Control Board, etc.), respectively. Capability exists to collect up to four levels of equipment failure data. The tool to analyze equipment failure data will be discussed in a later section.

Another important feature of the CDC module is the capability to customize a screen for gathering equipment monitor data. It serves the following objectives: 1) minimizes manual computations done by operators; 2) eliminates paper data collection forms from the floor; and 3) validates data entry.

Collecting data for a large sample size can be very cumbersome. To ease data entry, design of the screen layout becomes very important.

An engineer can define the screen layout for equipment monitor data collection using a forms management system (FMSTM). This customized screen is integrated into WORKSTREAM and is displayed at the time of data collection.

Several complex data collection screens have been designed and implemented across the company. Fig. 6 illustrates one such application. In the illustrated example, an operator will enter the focus measurements. Based on a formula, the system will display if any focus adjustment has to be made on the Ultratech Stepper.

Statistical process control charts can be attached and displayed with control limits for equipment monitor data. To

TMFMS is a product of Digital Equipment Corp.

CPT101S

ENGINEERING DATA COLLECTION

06/20/90 12:00:00

UT FOCUS

LOCATION	READING
-10.0	1
10.0	1
0.10	-1

ADJUSTMENT REQUIRED : YES

Fig. 6. Example of engineering data collection.

prevent wafer processing on the equipment, in case of critical equipment monitors violating SPC rules, the equipment can be placed in a "DOWN" state.

VI. FACTORY COMMUNICATION

For the smooth running of a facility communication between operators, technicians, supervisors, and engineers, regarding the current operational state and future scheduled downtimes of equipment, is vital.

Functionality was incorporated within WORKSTREAM to provide a snapshot of the current state of all machines in any given functional area of the factor. Information displayed includes:

- current equipment state (repair, waiting for parts, etc.);
- failure mode of the equipment;
- name of the technician fixing the equipment;
- date and time of an upcoming PM.

In practice, display monitors are placed in each functional area of the shop floor. Fig. 7 shows a monitor screen as displayed in a functional area.

A. Event Schedule Management

In any given facility, several types of events are scheduled to be performed on equipment. Events include:

- calendar-based PM (monthly PM, annual PM, etc.);
- usage-based PM (500 run PM, 40 run chamber clean, etc.);
- events triggered due to equipment monitor data violations.

Managing the schedules of all events manually, has the following limitations:

- paper has to be used for communication;
- poor visibility into performance of events against schedule;
- schedules not accessible to all in a timely manner;
- requires a dedicated person to maintain the schedules;
- equipment usage counters (number of runs, number of wafers) have to be maintained on paper.

Such manual systems were prevalent at various facilities.

In order to overcome the limitations of a manual system, the event scheduler of WORKSTREAM was adopted. Only calendar-based events were scheduled by the scheduler. To ensure visibility and high effectiveness of the schedules, the equipment was placed in a "DOWN" state, if any event was

RTC FLEXIBLE MONITOR BOARD - DISPLAY SCREEN (NFMB)									
FAB PRODUCTION					FAB		SYS 6/20/90 02:00:00		
FUNCTIONAL AREA: LITHO					PAGE 1				
SEL	MACHINE	AVAIL	USAGE	FAILURE MODE	LAST EVENT D/T	LAST OPER	NEXT EVENT	SCHED D/T	
	DP01A	DOWN	IN REPAIR	SPIN PROB	6/20/90 00:37:00	SMITH	BIMONTHLY	7/05/90 00:00:00	
	DP03B	DOWN	WAITING EOE	BAD DEVL	6/20/90 01:30:11	JOHN	ANNUAL PM	7/06/90 00:00:00	
	SU01	DOWN	WAITING ENG	MISSTEP	6/19/90 23:23:00	JAMES	WEEKLY PM	6/21/90 23:30:00	
	SU16	DOWN	IN REPAIR	SCRATCHES	6/20/90 00:42:00	JOE	WEEKLY PM	6/16/90 00:00:00	

Fig. 7. Display of current state of machines in a functional area.

overdue. This prevented wafer processing on the equipment, until the scheduled event was performed (e.g., PM).

B. Event Schedule Communication

Communication of scheduled events to personnel operating a machine serves two purposes. First, it provides the visibility of upcoming events, so that they get done on time to prevent any yield losses and unscheduled downtime. Secondly, it allows supervisors and engineers to plan for scheduled down time without interrupting the flow of WIP.

How do we communicate the schedule to the user? Communicating via a report turns out to be ineffective. The users need to be warned ahead of time on upcoming events that need attention. The schedule-messages module has the capability to provide the warning message.

What is a good place to display warning messages? A user performs certain transactions on an equipment on a regular basis. Such transactions include: viewing equipment history, viewing equipment definition, changing the state of equipment, etc. When the user is at a station performing a transaction, a warning message is displayed. The message includes warnings on all upcoming events for the equipment under consideration. The following is the format of warning messages displayed to the user:

- "500 wafer-PM is due in 20 wafer(s);"
- "160 run chamber-clean is due in 10 run(s);"
- "Monthly PM is due in 12 h and 15 min."

The schedule-messages module allows the definition of triggering conditions for the display of warning messages. The module can be configured, such that warning messages can be displayed while performing selected transactions on equipment. Finally, the user is allowed to inquire about all existing warning messages for a functional area.

VII. PAPERLESS MANUFACTURING

Paper, one of the sources of particle generation in the fabrication facility (clean room), needs to be eliminated at all costs. Paper log books are mainly used on the floor to document equipment repairs. The log serves as a communication medium for personnel working in different shifts. A log is maintained for each piece of equipment. For an engineer maintaining a group of machines, access to all the equipment logs becomes cumbersome.

A second source of paper related to equipment is the PM checklist. For every PM procedure performed on equipment, a checklist has to be filled out.

A. Equipment Communication Log

Tools were developed to allow users to maintain equipment logs as part of equipment history within the CAM

system. Capability was provided within WORKSTREAM to enter unlimited comments to the history of the machine. An inquiry was developed to view the history of a specific machine or group of machines. The inquiry can filter history data for any *ad hoc* time period. Using this inquiry, a user can obtain the following information:

- products processed on a specific machine;
- comments associated with a machine (example: repair information);
- engineering monitors collected on a machine;
- engineering monitors which violated statistical process control rules.

Fig. 8 illustrates an equipment repair history inquiry.

B. PM Checklist Data

The WORKSTREAM SPEC module is widely used for storing and retrieving process and equipment PM specification. As part of PM specifications, technicians who perform PM's need to fill out a checklist. A checklist includes a sequence of questions regarding the PM being performed. The purpose of a checklist is to ensure completion of a PM procedure and serve as a control and history document for audits. It also drives effective PM's.

In addition to answering questions on the PM performed, engineering data (pressure readings, temperature readings, particle counts, etc.) may have to be gathered. Before the machine is turned over to production, all mandatory steps defined for the checklist must be completed. A technician must be able to view a PM specification to complete the steps in a checklist. For future reference/audit, checklist data have to be retained as part of equipment history.

A new module was developed to meet the requirements of PM checklist data collection. The module allows an engineer to define various steps of a checklist that need to be completed as part of a PM procedure.

How does one interact with the checklist? A technician can walk up to a station and log a transaction to flag the commencement of a PM procedure for an equipment. At this point two things happen. First, the checklist associated with the PM procedure is opened. Second, the scheduler updates the schedule of the corresponding PM.

The technician would then process the steps in a checklist as the PM procedure progresses. The steps can be processed in any order. In practice, a technician may find problems while performing a step (e.g., not able to set a gage to the right value). The technician would identify the step as a *problem* step and associate his comments for future reference.

Engineers can monitor the progress of a checklist at any

FAB X
EQUIPMENT COMMUNICATION LOG
FROM: 6/07/90 14:20:00 TO: 6/14/90 16:00:00

AREA: LITHO	Equipment	Date	Event	Time	User	Comments
UT STEPPER	SU01	6/13/90	21:52:12 REPAIR DATA	01:19	JOHN	FAILURE MODE : FOCUS ACTION : ADJUSTED SUB-UTSTEPPER : FOCUS SYSTEM SSB-UTSTEPPER : FM SET UP
	SU01	6/13/90	21:51:45 BEGIN REPAIR	00:27	SMITH	Ran C cycle, Water hold stability and leak check were good.
	SU01	6/13/90	17:51:26 TECH AVAIL	4:40:19	SMITH	
	SU01	6/13/90	15:57:07 NO TECH	1:14:19	JOE	Needs FM setup up - Focus problem
	SU01	6/09/90	23:49:17 BEGIN PM	15:00	JAKE	FAILURE MODE : PM
	SU01	6/07/90	16:32:56 REPAIR DATA	00:28	SMITH	FAILURE MODE : AUTO LOADER ACTION : REPLACED SUB-UTSTEPPER : LOAD/UNLOAD SSB-UTSTEPPER : BELTS
	SU01	6/07/90	15:55:12 BEGIN REPAIR	00:24	SMITH	FAILURE MODE : AUTO LOADER

Fig. 8. Contents of equipment communication log.

point in time. When the checklist is closed successfully, the checklist steps are stored as part of equipment history. The users have the ability to pull checklist information from the history of equipment. Fig. 9 illustrates a PM checklist during processing.

VII. EQUIPMENT RELIABILITY, AVAILABILITY, MAINTAINABILITY (ERAM) ANALYSIS

In the earlier sections, the mechanics of gathering equipment failure and performance data via the CAM system were discussed. However, how does the end user get his key indicators on equipment reliability with minimal training and effort? A five man year effort culminated in one such system for the end user. The user can generate plots of key indicators like availability, utilization, MTTR, MTBF, etc. Equipment failure prediction is done using *Weibull* techniques.

A manual system of computing key equipment reliability indicators is very laborious. Many times there is a duplication of effort within the company. The manual system does not adhere to one set of corporate standards, thus making corporate wide analysis of equipment reliability data impossible.

A. Application of Equipment Performance Data

Where does the equipment performance data get used? Several programs like equipment failure prediction, equipment capacity analysis, high output programs, vendor maintenance contracts, day-to-day maintenance planning in factories, etc., need equipment performance data. These data are also required to implement techniques such as failure mode effects and criticality analysis (FMECA) and fault tree analysis (FTA). Through the use of FMECA/FTA techniques, engineers will be able to reduce diagnosis/trouble shooting time and define better PM procedures to prevent failures during the life of the equipment.

B. Analysis Tool Requirements

As the equipment analysis tool is used by a variety of users and for several applications, the tool was designed to meet the following core requirements:

- configuration to be independent of the data-model used in the CAM system to track equipment performance;

CALLS SELECT CHECKLIST STEP FOR PROCESS (11PC) SYS 06/07/90 15:20:18
PAGE 001

CHECKLIST NAME: QUARTERLY PM VERSION: 01 OPENED ON: 06/07/90 15:20

OPERATOR ID: HSHAH

SEL STEP	DESCRIPTION	DATE	TIME	USER	STATUS
0001	Remove End Load Overlay	06/07/90	11:20	HSHAH	0
	Trace1 completed	06/07/90	12:00	HSHAH	0
	Trace2 completed	06/07/90	12:00	HSHAH	0
	Trace3 completed	06/07/90	12:30	HSHAH	0
0007	Check and reset stepper 1200	06/07/90	12:55	ARAMESH	0
0008	Transfer 100 wafers	06/07/90	12:55	ARAMESH	0
	Trace1				
	Trace2				
	Trace3				
0004	Reset Stepper	06/07/90	11:00	ARAMESH	0

ENGINEERING DATA
RESET TYPE: 1340
TIME: 1200 1210 1220 1230 1240
1250 1260 1270 1280 1290
1300 1310 1320 1330 1340
1350 1360 1370 1380 1390
1400 1410 1420 1430 1440
1450 1460 1470 1480 1490
1500 1510 1520 1530 1540
1550 1560 1570 1580 1590
1600 1610 1620 1630 1640
1650 1660 1670 1680 1690
1700 1710 1720 1730 1740
1750 1760 1770 1780 1790
1800 1810 1820 1830 1840
1850 1860 1870 1880 1890
1900 1910 1920 1930 1940
1950 1960 1970 1980 1990
2000 2010 2020 2030 2040
2050 2060 2070 2080 2090
2100 2110 2120 2130 2140
2150 2160 2170 2180 2190
2200 2210 2220 2230 2240
2250 2260 2270 2280 2290
2300 2310 2320 2330 2340
2350 2360 2370 2380 2390
2400 2410 2420 2430 2440
2450 2460 2470 2480 2490
2500 2510 2520 2530 2540
2550 2560 2570 2580 2590
2600 2610 2620 2630 2640
2650 2660 2670 2680 2690
2700 2710 2720 2730 2740
2750 2760 2770 2780 2790
2800 2810 2820 2830 2840
2850 2860 2870 2880 2890
2900 2910 2920 2930 2940
2950 2960 2970 2980 2990
3000 3010 3020 3030 3040
3050 3060 3070 3080 3090
3100 3110 3120 3130 3140
3150 3160 3170 3180 3190
3200 3210 3220 3230 3240
3250 3260 3270 3280 3290
3300 3310 3320 3330 3340
3350 3360 3370 3380 3390
3400 3410 3420 3430 3440
3450 3460 3470 3480 3490
3500 3510 3520 3530 3540
3550 3560 3570 3580 3590
3600 3610 3620 3630 3640
3650 3660 3670 3680 3690
3700 3710 3720 3730 3740
3750 3760 3770 3780 3790
3800 3810 3820 3830 3840
3850 3860 3870 3880 3890
3900 3910 3920 3930 3940
3950 3960 3970 3980 3990
4000 4010 4020 4030 4040
4050 4060 4070 4080 4090
4100 4110 4120 4130 4140
4150 4160 4170 4180 4190
4200 4210 4220 4230 4240
4250 4260 4270 4280 4290
4300 4310 4320 4330 4340
4350 4360 4370 4380 4390
4400 4410 4420 4430 4440
4450 4460 4470 4480 4490
4500 4510 4520 4530 4540
4550 4560 4570 4580 4590
4600 4610 4620 4630 4640
4650 4660 4670 4680 4690
4700 4710 4720 4730 4740
4750 4760 4770 4780 4790
4800 4810 4820 4830 4840
4850 4860 4870 4880 4890
4900 4910 4920 4930 4940
4950 4960 4970 4980 4990
5000 5010 5020 5030 5040
5050 5060 5070 5080 5090
5100 5110 5120 5130 5140
5150 5160 5170 5180 5190
5200 5210 5220 5230 5240
5250 5260 5270 5280 5290
5300 5310 5320 5330 5340
5350 5360 5370 5380 5390
5400 5410 5420 5430 5440
5450 5460 5470 5480 5490
5500 5510 5520 5530 5540
5550 5560 5570 5580 5590
5600 5610 5620 5630 5640
5650 5660 5670 5680 5690
5700 5710 5720 5730 5740
5750 5760 5770 5780 5790
5800 5810 5820 5830 5840
5850 5860 5870 5880 5890
5900 5910 5920 5930 5940
5950 5960 5970 5980 5990
6000 6010 6020 6030 6040
6050 6060 6070 6080 6090
6100 6110 6120 6130 6140
6150 6160 6170 6180 6190
6200 6210 6220 6230 6240
6250 6260 6270 6280 6290
6300 6310 6320 6330 6340
6350 6360 6370 6380 6390
6400 6410 6420 6430 6440
6450 6460 6470 6480 6490
6500 6510 6520 6530 6540
6550 6560 6570 6580 6590
6600 6610 6620 6630 6640
6650 6660 6670 6680 6690
6700 6710 6720 6730 6740
6750 6760 6770 6780 6790
6800 6810 6820 6830 6840
6850 6860 6870 6880 6890
6900 6910 6920 6930 6940
6950 6960 6970 6980 6990
7000 7010 7020 7030 7040
7050 7060 7070 7080 7090
7100 7110 7120 7130 7140
7150 7160 7170 7180 7190
7200 7210 7220 7230 7240
7250 7260 7270 7280 7290
7300 7310 7320 7330 7340
7350 7360 7370 7380 7390
7400 7410 7420 7430 7440
7450 7460 7470 7480 7490
7500 7510 7520 7530 7540
7550 7560 7570 7580 7590
7600 7610 7620 7630 7640
7650 7660 7670 7680 7690
7700 7710 7720 7730 7740
7750 7760 7770 7780 7790
7800 7810 7820 7830 7840
7850 7860 7870 7880 7890
7900 7910 7920 7930 7940
7950 7960 7970 7980 7990
8000 8010 8020 8030 8040
8050 8060 8070 8080 8090
8100 8110 8120 8130 8140
8150 8160 8170 8180 8190
8200 8210 8220 8230 8240
8250 8260 8270 8280 8290
8300 8310 8320 8330 8340
8350 8360 8370 8380 8390
8400 8410 8420 8430 8440
8450 8460 8470 8480 8490
8500 8510 8520 8530 8540
8550 8560 8570 8580 8590
8600 8610 8620 8630 8640
8650 8660 8670 8680 8690
8700 8710 8720 8730 8740
8750 8760 8770 8780 8790
8800 8810 8820 8830 8840
8850 8860 8870 8880 8890
8900 8910 8920 8930 8940
8950 8960 8970 8980 8990
9000 9010 9020 9030 9040
9050 9060 9070 9080 9090
9100 9110 9120 9130 9140
9150 9160 9170 9180 9190
9200 9210 9220 9230 9240
9250 9260 9270 9280 9290
9300 9310 9320 9330 9340
9350 9360 9370 9380 9390
9400 9410 9420 9430 9440
9450 9460 9470 9480 9490
9500 9510 9520 9530 9540
9550 9560 9570 9580 9590
9600 9610 9620 9630 9640
9650 9660 9670 9680 9690
9700 9710 9720 9730 9740
9750 9760 9770 9780 9790
9800 9810 9820 9830 9840
9850 9860 9870 9880 9890
9900 9910 9920 9930 9940
9950 9960 9970 9980 9990
10000 10010 10020 10030 10040
10050 10060 10070 10080 10090
10100 10110 10120 10130 10140
10150 10160 10170 10180 10190
10200 10210 10220 10230 10240
10250 10260 10270 10280 10290
10300 10310 10320 10330 10340
10350 10360 10370 10380 10390
10400 10410 10420 10430 10440
10450 10460 10470 10480 10490
10500 10510 10520 10530 10540
10550 10560 10570 10580 10590
10600 10610 10620 10630 10640
10650 10660 10670 10680 10690
10700 10710 10720 10730 10740
10750 10760 10770 10780 10790
10800 10810 10820 10830 10840
10850 10860 10870 10880 10890
10900 10910 10920 10930 10940
10950 10960 10970 10980 10990
11000 11010 11020 11030 11040
11050 11060 11070 11080 11090
11100 11110 11120 11130 11140
11150 11160 11170 11180 11190
11200 11210 11220 11230 11240
11250 11260 11270 11280 11290
11300 11310 11320 11330 11340
11350 11360 11370 11380 11390
11400 11410 11420 11430 11440
11450 11460 11470 11480 11490
11500 11510 11520 11530 11540
11550 11560 11570 11580 11590
11600 11610 11620 11630 11640
11650 11660 11670 11680 11690
11700 11710 11720 11730 11740
11750 11760 11770 11780 11790
11800 11810 11820 11830 11840
11850 11860 11870 11880 11890
11900 11910 11920 11930 11940
11950 11960 11970 11980 11990
12000 12010 12020 12030 12040
12050 12060 12070 12080 12090
12100 12110 12120 12130 12140
12150 12160 12170 12180 12190
12200 12210 12220 12230 12240
12250 12260 12270 12280 12290
12300 12310 12320 12330 12340
12350 12360 12370 12380 12390
12400 12410 12420 12430 12440
12450 12460 12470 12480 12490
12500 12510 12520 12530 12540
12550 12560 12570 12580 12590
12600 12610 12620 12630 12640
12650 12660 12670 12680 12690
12700 12710 12720 12730 12740
12750 12760 12770 12780 12790
12800 12810 12820 12830 12840
12850 12860 12870 12880 12890
12900 12910 12920 12930 12940
12950 12960 12970 12980 12990
13000 13010 13020 13030 13040
13050 13060 13070 13080 13090
13100 13110 13120 13130 13140
13150 13160 13170 13180 13190
13200 13210 13220 13230 13240
13250 13260 13270 13280 13290
13300 13310 13320 13330 13340
13350 13360 13370 13380 13390
13400 13410 13420 13430 13440
13450 13460 13470 13480 13490
13500 13510 13520 13530 13540
13550 13560 13570 13580 13590
13600 13610 13620 13630 13640
13650 13660 13670 13680 13690
13700 13710 13720 13730 13740
13750 13760 13770 13780 13790
13800 13810 13820 13830 13840
13850 13860 13870 13880 13890
13900 13910 13920 13930 13940
13950 13960 13970 13980 13990
14000 14010 14020 14030 14040
14050 14060 14070 14080 14090
14100 14110 14120 14130 14140
14150 14160 14170 14180 14190
14200 14210 14220 14230 14240
14250 14260 14270 14280 14290
14300 14310 14320 14330 14340
14350 14360 14370 14380 14390
14400 14410 14420 14430 14440
14450 14460 14470 14480 14490
14500 14510 14520 14530 14540
14550 14560 14570 14580 14590
14600 14610 14620 14630 14640
14650 14660 14670 14680 14690
14700 14710 14720 14730 14740
14750 14760 14770 14780 14790
14800 14810 14820 14830 14840
14850 14860 14870 14880 14890
14900 14910 14920 14930 14940
14950 14960 14970 14980 14990
15000 15010 15020 15030 15040
15050 15060 15070 15080 15090
15100 15110 15120 15130 15140
15150 15160 15170 15180 15190
15200 15210 15220 15230 15240
15250 15260 15270 15280 15290
15300 15310 15320 15330 15340
15350 15360 15370 15380 15390
15400 15410 15420 15430 15440
15450 15460 15470 15480 15490
15500 15510 15520 15530 15540
15550 15560 15570 15580 15590
15600 15610 15620 15630 15640
15650 15660 15670 15680 15690
15700 15710 15720 15730 15740
15750 15760 15770 15780 15790
15800 15810 15820 15830 15840
15850 15860 15870 15880 15890
15900 15910 15920 15930 15940
15950 15960 15970 15980 15990
16000 16010 16020 16030 16040
16050 16060 16070 16080 16090
16100 16110 16120 16130 16140
16150 16160 16170 16180 16190
16200 16210 16220 16230 16240
16250 16260 16270 16280 16290
16300 16310 16320 16330 16340
16350 16360 16370 16380 16390
16400 16410 16420 16430 16440
16450 16460 16470 16480 16490
16500 16510 16520 16530 16540
16550 16560 16570 16580 16590
16600 16610 16620 16630 16640
16650 16660 16670 16680 16690
16700 16710 16720 16730 16740
16750 16760 16770 16780 16790
16800 16810 16820 16830 16840
16850 16860 16870 16880 16890
16900 16910 16920 16930 16940
16950 16960 16970 16980 16990
17000 17010 17020 17030 17040
17050 17060 17070 17080 17090
17100 17110 17120 17130 17140
17150 17160 17170 17180 17190
17200 17210 17220 17230 17240
17250 17260 17270 17280 17290
17300 17310 17320 17330 17340
17350 17360 17370 17380 17390
17400 17410 17420 17430 17440
17450 17460 17470 17480 17490
17500 17510 17520 17530 17540
17550 17560 17570 17580 17590
17600 17610 17620 17630 17640
17650 17660 17670 17680 17690
17700 17710 17720 17730 17740
17750 17760 17770 17780 17790
17800 17810 17820 17830 17840
17850 17860 17870 17880 17890
17900 17910 17920 17930 17940
17950 17960 17970 17980 17990
18000 18010 18020 18030 18040
18050 18060 18070 18080 18090
18100 18110 18120 18130 18140
18150 18160 18170 18180 18190
18200 18210 18220 18230 18240
18250 18260 18270 18280 18290
18300 18310 18320 18330 18340
18350 18360 18370 18380 18390
18400 18410 18420 18430 18440
18450 18460 18470 18480 18490
18500 18510 18520 18530 18540
18550

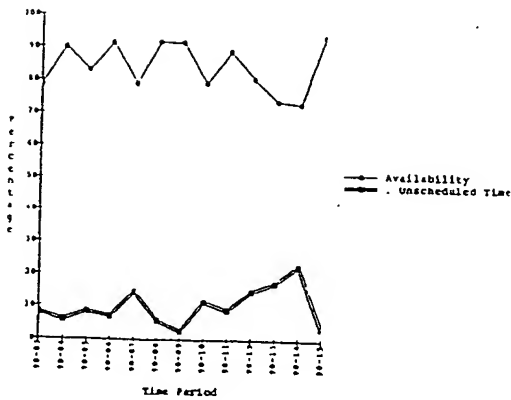


Fig. 10. Equipment availability graph.

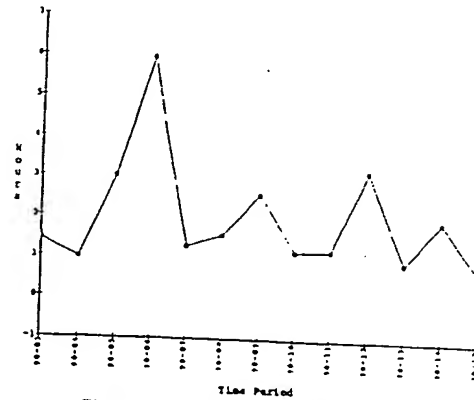


Fig. 12. Equipment MTTR graph.

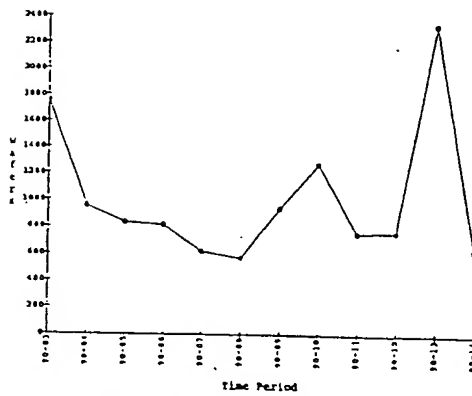


Fig. 11. Equipment MWBF graph.

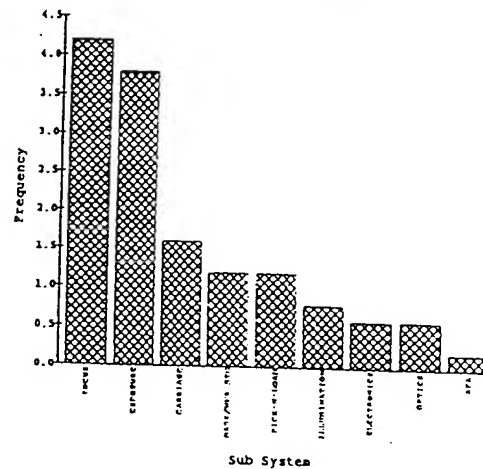


Fig. 13. Equipment subsystem failure graph.

TABLE I
ILLUSTRATION OF E-10 (SEMI-STANDARD) BASIC STATES

EQUIPMENT STATE	PRODUCING	STANDBY	ENG.	SCHEDULED	UNSCHEDULED	NON-SCH.
RUNNING	YES					
NO WIP		YES				
NO OPERATOR		YES				
WAITING MAINT						
REPAIR					YES	
HOLIDAY					YES	
TEST WAFER			YES			YES
MONTHLY PM				YES		

the analysis tool. To allow more granularity for analyzing failure data, engineers are allowed to inquire about the failure frequency of sub-subsystems (bearing, control board, etc.) within a given subsystem (Autoloader).

E. Weibull Analysis

Aerospace companies have widely used *Weibull* analysis for equipment failure prediction. Weibull analysis provides answers to the following questions frequently asked by engineers.

- What are the chances of an equipment subsystem breaking in the next 40 h?

- What is the quality of repairs?
- What is the risk of failure after 30 h of operation?
- How frequently should a PM procedure be done?
- How many spares are required?
- What is the root cause of failure?
design?
material quality?
insufficient testing?

To manually perform *Weibull* analysis, a great deal of time and effort needs to be expended. Several iterations are required before the data are ready to be used in the analysis. By automating the tedious tasks, the analysis has been simpli-

fied. An analysis can now be performed in a couple of minutes. The user interface assumes that the user has no exposure to any statistical tool.

Weibull analysis is performed on the equipment failure data gathered via the CAM system. The most important data required for this analysis are the available time or equipment-usage (number of runs or wafers processed) between each failure of a given subsystem (Autoloader, Indexer).

Analysis is performed in four steps. First, the user is allowed to extract equipment data covering any length of time. Second, the user is allowed to select the failures that need to be part of the analysis. Third, a *Weibull* graph is plotted using a statistical package. Lastly, the user can interpret the *Weibull* graph using the built-in advisor function. A description of the underlying theory of *Weibull* analysis is beyond the scope of this paper.

Characteristic life and slope of the fitted line (beta) are the two key terms used in the analysis. Characteristic life is defined as the point by which 63.2% of the units under study will have failed and 36.8% will remain in service. There are three categories of beta:

- 1) infant mortality: $\beta < 1$;
- 2) random failures: $\beta = 1$;
- 3) wear out: $\beta > 1$;

Using the advisor function on the graph, the user can answer two questions.

- 1) What percent of parts would fail after a given number of hours or unit of operation?
- 2) For what length of time or number of units, can a machine be operated before a given percent of parts fail?

Fig. 14 illustrates a *Weibull* plot used to determine frequency of O-ring replacement to minimize both unscheduled downtime and cost. Based on the underlying failure data of the O-ring, we can make the following conclusions:

- inspect O-ring at 40 h;
- change O-ring at 80 h.

IX. MANAGING STATISTICAL PROCESS CONTROL VIOLATIONS OF EQUIPMENT MONITORS

To ensure the stable health of the equipment to minimize losses and unscheduled downtime, statistical process control (SPC) techniques have been widely used for equipment monitors. PM's can also be scheduled based on the SPC data as opposed to scheduling them on a fixed interval basis.

A new module integrated with WORKSTREAM was developed to meet the requirements for managing SPC rule violation alarms. This module provides a front end to view all the alarms that have been generated by equipment monitors for a specific equipment or for a group of equipment. Engineers have the capability to write comments to an alarm and finally close the alarm as being resolved. This annotation to the alarm will then be stored as part of the equipment history. One can determine the current status of an alarm by viewing the associated annotations. Such a tool allows engineers to document SPC violations and generate information

WEIBULL ANALYSIS PM TASK EXAMPLE: O-RINGS

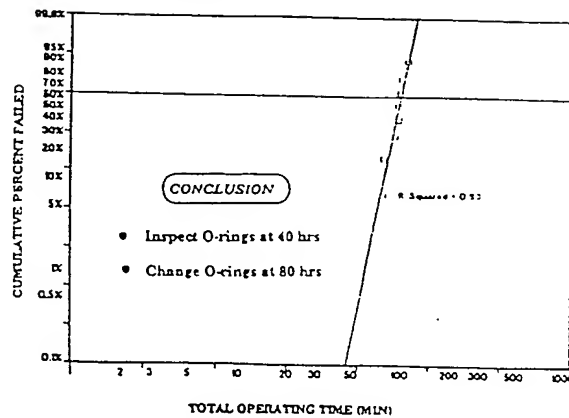


Fig. 14. Example of a Weibull plot.

for customer audits and future reference. Fig. 15 is a graphical illustration of this functionality.

X. PROJECT IMPLEMENTATION

Currently, the equipment management system has been deployed at eight Intel facilities and SEMATECH. The equipment state models to track performance/failure data were different at each facility depending on a facility's maturity and business needs. The needs of startup factories are very different than the needs of mature production factories and development factories.

User groups comprising of operators, technicians, process/equipment engineers, systems analysts, and supervisors were formed to develop an equipment performance tracking model that met factory needs. Flexible tools developed by Consilium and Intel were used to make this model as close to the real world as possible. Usage of the system and completeness of the data is ensured when a system can mirror the real world needs. All tools developed have been successful and are being used extensively.

XI. INTEGRATION WITH EXTERNAL SYSTEMS

Intel has introduced various automation products into its factories. The biggest challenge is to integrate all the products together. The automation products include expert systems, automated material handling systems, and station controllers.

Equipment downtime data that are being collected manually by the operator can now be automatically collected by the station controller through the machine-interface software. Where should equipment management reside? At the station controller or the host system? These are some of the questions we are currently trying to answer. Expert systems hold promise as an excellent tool for troubleshooting equipment failures. Combining features of the expert system and the equipment performance system to get the best results is another integration task.

XII. CONCLUSION

To drive high equipment reliability/utilization in manufacturing, a comprehensive equipment information management

(19) 日本国特許庁 (J P)

(12) 公開特許公報 (A)

(11) 特許出願公開番号

特開平8-149583

(43) 公開日 平成8年(1996)6月7日

(51) Int.Cl. ⁶	識別記号	序内整理番号	F I	技術表示箇所
H 0 4 Q 9/00	3 1 1 W			
	3 7 1 B			
G 0 5 B 23/02	3 0 1 W	7618-3H		
G 0 6 F 11/22	3 6 0 L			

G 0 6 F 15/ 21

R

審査請求 未請求 請求項の数5 OL (全 10 頁) 最終頁に続く

(21) 出願番号 特願平6-286832

(22) 出願日 平成6年(1994)11月21日

(71) 出願人 000006013

三菱電機株式会社

東京都千代田区丸の内二丁目2番3号

(72) 発明者 平松 伸一

神戸市兵庫区和田崎町1丁目1番2号 三

菱電機株式会社制御製作所内


(74) 代理人 弁理士 宮園 純一

(54) 【発明の名称】 プロセスコントローラ及びデータ監視方法

(57) 【要約】

【目的】 プロセスコントローラの寿命部品の交換時期を自動的に監視することにより故障を未然に防止し、更に、保守点検作業の簡略化及び時間短縮が図れるプロセスコントローラを得る。

【構成】 プロセスコントローラの寿命を有する構成部品の使用開始日と交換周期は設定スイッチ9により設定され、使用開始日表示器4と交換周期表示器6にそれぞれ表示される。使用開始日から現在に至るまでの稼働期間は計算手段15aにより計算され、稼働期間表示器5に表示される。稼働期間が交換周期を過ぎると、警告信号出力手段15bより警告信号が出力される。

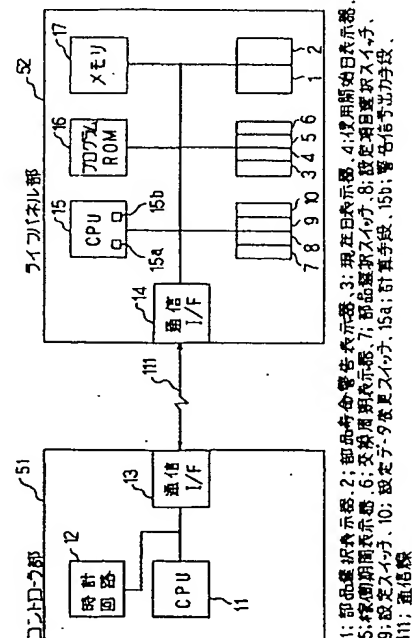

【特許請求の範囲】

【請求項1】 制御対象を制御するプロセスコントローラにおいて、寿命を有する構成部品の使用開始日や交換周期を設定できる設定手段と、上記使用開始日から現在に至るまでの稼働期間を計算する計算手段と、上記稼働期間が上記交換周期を過ぎると警告信号を出力する警告信号出力手段と、上記使用開始日や上記稼働期間や上記交換周期等の部品寿命データを表示する部品寿命データ表示手段とを備えたことを特徴とするプロセスコントローラ。

【請求項2】 制御対象を制御するプロセスコントローラと上位マンマシン監視装置とを接続し、上記プロセスコントローラにおいて生成された部品寿命データを上記上位マンマシン監視装置でも監視可能にしたことを特徴とするデータ監視方法。

【請求項3】 制御対象を制御するプロセスコントローラと電話回線とを接続し、上記プロセスコントローラにおいて生成された部品寿命データを電話機やファクシミリでも監視可能にしたことを特徴とするデータ監視方法。

【請求項4】 制御対象を制御するプロセスコントローラとプログラム作成ツールとを接続し、上記プロセスコントローラにおいて生成された部品寿命データを上記プログラム作成ツールでも監視可能にしたことを特徴とするデータ監視方法。

【請求項5】 制御対象を制御するプロセスコントローラにおいて、寿命を有する構成部品の使用開始日や交換周期を設定できる設定手段と、上記使用開始日から現在に至るまでの稼働期間を計算する計算手段と、上記稼働期間が上記交換周期を過ぎると警告信号を出力する警告信号出力手段と、上記使用開始日や上記稼働期間や上記交換周期等の部品寿命データを表示する部品寿命データ表示手段と、上記部品寿命データを蓄える部品交換履歴リストファイルとを備えたことを特徴とするプロセスコントローラ。

【発明の詳細な説明】

【0001】

【産業上の利用分野】この発明は、プラント等を制御する計装制御システムに適用されるプロセスコントローラ及びデータ監視方法に関するものである。

【0002】

【従来の技術】図10は、例えば三菱総合計装制御システム MACTUS530 保守点検要領書(IB-62527-A, 1993年6月発行)に示された計装制御システムにおける従来のプロセスコントローラの稼働状況を運転員に示すためのモニターパネルであり、図11は、このプロセスコントローラの概略斜視図である。図10において、25～29がプロセスコントローラの状態を示す各LED表示器であり、詳しくは25は重故障LED表示器、26は軽故障LED表示器、27はC

PU電源異常LED表示器、28はIO電源異常LED表示器、29はバッテリー低下LED表示器を示す。又、30は重故障の要因を示す論理図、31は軽故障の要因を示す論理図を描いたものである。

【0003】次に動作について説明する。プロセスコントローラの運転員は、計装制御システムが正常であるか異常が発生していないかを重故障LED表示器25及び軽故障LED表示器26をモニターして判断する。各LED表示器25～29は正常で点灯し、異常で消灯する。

10

【0004】重故障LED表示器25が消灯している場合、プロセスコントローラに重故障が発生しているものと判断する。次に、重故障が発生している要因を論理図30によりたどり異常部位を特定する。例えば、CPU電源LED表示器27及びIO電源LED表示器28が消灯している場合、CPU電源の異常及びIO電源の異常の発生によりシステム重故障が発生しているものと異常部位を判断できる。次に、プロセスコントローラを停止させ、故障したCPU電源及びIO電源の装置の交換を行ない、計装制御システムを復旧させる。

20

【0005】同様に、軽故障LED表示器26が消灯している場合、プロセスコントローラに軽故障が発生しているものと判断し、軽故障が発生している要因を論理図31によりたどり異常部位を特定する。例えば、バッテリー低下LED表示器29が消灯している場合、バッテリーが低下しているので新しいバッテリーと交換が必要である。

【0006】

30

【発明が解決しようとする課題】従来のプロセスコントローラのモニターパネルは以上のように構成されているので、各部品が正常か異常かの判断は可能であるが、モニターパネルを確認しただけでは、その部品に寿命が来ており交換を要するかどうかまでは判断できず、別途、運転員が定期的に部品交換表を作成することが必要であり、それにより部品交換時期を確認しなければならない不便さがあった。

【0007】この発明は上記のような課題を解決するためになされたものであり、プロセスコントローラの寿命部品の交換時期を自動的に監視することにより故障を未然に防止し、更に、保守点検作業の簡略化及び時間短縮が図れるプロセスコントローラを得ることを目的とする。

40

【0008】

【課題を解決するための手段】第1の発明に係るプロセスコントローラは、寿命を有する構成部品の使用開始日や交換周期を設定できる設定手段(設定スイッチ9)と、上記使用開始日から現在に至るまでの稼働期間を計算する計算手段15aと、上記稼働期間が上記交換周期を過ぎると警告信号を出力する警告信号出力手段15bと、上記使用開始日や上記稼働期間や上記交換周期等の

50

部品寿命データを表示する部品寿命データ表示手段（使用開始日表示器4、稼働期間表示器5、交換周期表示器6）とを備えたことを特徴とするものである。

【0009】第2の発明に係るデータ監視方法は、制御対象を制御するプロセスコントローラPと上位マンマシン監視装置18とを接続し、上記プロセスコントローラPにおいて生成された部品寿命データを上記上位マンマシン監視装置18でも監視可能にしたことを特徴とするものである。

【0010】第3の発明に係るデータ監視方法は、制御対象を制御するプロセスコントローラPと電話回線95とを接続し、上記プロセスコントローラPにおいて生成された部品寿命データを電話機92やファクシミリ93でも監視可能にしたことを特徴とするものである。

【0011】第4の発明に係るデータ監視方法は、制御対象を制御するプロセスコントローラPとプログラム作成ツール20とを接続し、上記プロセスコントローラPにおいて生成された部品寿命データを上記プログラム作成ツール20でも監視可能にしたことを特徴とするものである。

【0012】第5の発明に係るプロセスコントローラは、寿命を有する構成部品の使用開始日や交換周期を設定できる設定手段（設定スイッチ9）と、上記使用開始日から現在に至るまでの稼働期間を計算する計算手段15aと、上記稼働期間が上記交換周期を過ぎると警告信号を出力する警告信号出力手段15bと、上記使用開始日や上記稼働期間や上記交換周期等の部品寿命データを表示する部品寿命データ表示手段（使用開始日表示器4、稼働期間表示器5、交換周期表示器6）と、上記部品寿命データを蓄える部品交換履歴リストファイル23とを備えたことを特徴とするものである。

【0013】

【作用】第1の発明に係るプロセスコントローラにおいては、寿命を有する構成部品の使用開始日や交換周期を設定手段（設定スイッチ9）により設定され、使用開始日から現在に至るまでの稼働期間が計算手段15aにより計算される。また、使用開始日と交換周期と稼働期間は部品寿命データ表示手段（使用開始日表示器4、交換周期表示器6、稼働期間表示器5）に表示される。稼働期間が交換周期を過ぎると、警告信号出力手段15bから警告信号が出力される。

【0014】第2の発明に係るデータ監視方法においては、プロセスコントローラPで生成された部品寿命データは上位マンマシン監視装置18に送られ、上位マンマシン監視装置18でも監視可能となる。

【0015】第3の発明に係るデータ監視方法においては、プロセスコントローラPで生成された部品寿命データは電話回線95を介して電話機92やファクシミリ93に送られる。これにより電話機92やファクシミリ93でも部品寿命データが監視可能となる。

【0016】第4の発明に係るデータ監視方法においては、プロセスコントローラPで生成された部品寿命データはプログラム作成ツール20に送られ、プログラム作成ツール20でも監視可能となる。

【0017】第5の発明に係るプロセスコントローラにおいては、寿命を有する構成部品の使用開始日や交換周期が設定手段（設定スイッチ9）により設定され、使用開始日から現在に至るまでの稼働期間が計算手段15aにより計算される。また、使用開始日と交換周期と稼働期間は部品寿命データ表示手段（使用開始日表示器4、交換周期表示器6、稼働期間表示器5）に表示される。稼働期間が交換周期を過ぎると、警告信号出力手段15bから警告信号が出力される。また、部品寿命データは部品交換履歴リストファイル23に蓄えられる。

【0018】

【実施例】

実施例1. 以下、この発明の実施例1を図に基づいて説明する。図1はこの発明の実施例1に係るプロセスコントローラの構成を示すブロック図である。図1において、コントローラ部51はCPU11、時計回路12、及び通信インタフェース（通信I/F）13を備えている。ライフパネル部52は、通信インタフェース14、CPU15、プログラムROM16、メモリ17、部品選択表示器1、部品寿命警告表示器2、現在日表示器3、使用開始日表示器（部品寿命データ表示手段）4、稼働期間表示器（部品寿命データ表示手段）5、交換周期表示器（部品寿命データ表示手段）6、部品選択スイッチ7、設定項目選択スイッチ8、設定スイッチ（設定手段）9、及び設定データ変更スイッチ10を備えている。なお、上記表示器1、2はLEDで実現され、上記表示器3～6は英数字LEDで実現される。コントローラ部51とライフパネル部52は通信線111を介して接続されている。上記ライフパネル部52内の設定スイッチ9は、本プロセスコントローラに備えられる図示しない電源装置、ファン、フィルタ、バッテリー等のような特に寿命がある部品の使用開始日や交換周期を設定できる設定手段である。また、CPU15は、部品の使用開始日から現在に至るまでの稼働期間を計算する計算手段15aと、上記稼働期間が上記交換周期を過ぎると警告信号を出力する警告信号出力手段15bとを備えている。図2は上記ライフパネル部52における表示パネル53の概略外観図である。この表示パネル53は、上述したように、部品選択表示器1、部品寿命警告表示器2、現在日表示器3、使用開始日表示器4、稼働期間表示器5、交換周期表示器6、部品選択スイッチ7、設定項目選択スイッチ8、設定スイッチ9、及び設定データ変更スイッチ10を備えている。

【0019】図1に示すライフパネル部52におけるCPU15は、部品選択表示器1、部品寿命警告表示器2、現在日表示器3、使用開始日表示器4、稼働期間表

5

示器5、交換周期表示器6、部品選択スイッチ7、設定項目選択スイッチ8、設定スイッチ9、及び設定データ変更スイッチ10を制御する。プログラムROM16はCPU15が制御を行うためのプログラムを記憶している。メモリ17は、部品の使用開始日、稼働期間、交換周期などの記憶を行う。ライフパネル部52が現在日を認識するために、通信インタフェース13、14及び通信線111を介してコントローラ部51のCPU11と通信し、コントローラ部51の時計回路12の時刻を読み出す。

【0020】次に図2の表示パネル53の表示内容、操作方法について説明する。プロセスコントローラにおいて寿命を確認したい部品を部品選択スイッチ7により選択する。現在、選択されている部品は、該当の部品選択表示器1が点灯する。その部品の使用開始日、稼働期間はそれぞれ使用開始日表示器4、稼働期間表示器5に表示される。稼働期間表示器5に表示される稼働期間は、現在日表示器3に表示される現在日から使用開始日表示器4に表示される使用開始日を引いたものであり、その部品の稼働期間は、交換周期表示器6に表示される。稼働期間表示器5と交換周期表示器6の表示内容により、あとどれだけその部品が使用できるか判断できる。稼働期間は計算手段15aにより計算され、稼働期間表示器5に表示された稼働期間が交換周期表示器6に表示された交換周期を越え、部品の交換時期であり、警告信号出力手段15bからの警告信号により部品寿命警告表示器2が点灯し、部品の交換時期を運転員に知らせる。現在日表示器3、使用開始日表示器4、交換周期表示器6の内容は寿命表示パネル上で変更することができる。変更方法は、変更したい項目を設定項目選択スイッチ8で選択し、設定データ変更スイッチ10でデータの数値を変更する。変更後、設定スイッチ9を押すことにより変更された内容が登録される。

【0021】次にライフパネル部52のCPU15の動作を図3～図5に示すフローチャートで説明する。先ず、図3のフローチャートは部品寿命警告表示器2の表示処理について示したものである。ライフパネル部52のCPU15は、コントローラ部51の時計回路12の時刻を通信インタフェース14を通して読み出し、現在日を認識する(ステップST1)。次に使用開始日をメモリ17により読み出す(ステップST2)。そして現在日から使用開始日を引き、稼働期間を計算しメモリ17に記憶する(ステップST3)。その後、交換周期をメモリ17より読み出し、稼働期間と比較する(ステップST4)。稼働期間が交換周期を越えた場合は、部品寿命警告表示器2を点灯させる(ステップST5)。このようなステップST2からステップST5の処理を全部品分を行う(ステップST6)。

【0022】次に、図4のフローチャートは現在日、使

6

用開始日、交換周期の設定変更処理を示したものである。まず、現在日の変更が有ったかどうかを確認し(ステップST7)、変更が有った場合は、コントローラ部51の時計回路12の時刻12を修正する(ステップST8)。次に部品選択スイッチ7により現在選択されている部品を認識しておく(ステップST9)。そして、使用開始日、交換周期が変更されたかどうかを確認し(ステップST10、ステップST12)、変更が有った場合は、メモリ17に記憶されている内容である使用開始日、交換周期を変更する(ステップST11、ステップST13)。

【0023】次に、図5のフローチャートは各表示器3～6の表示処理について示したものである。現在日表示器3は、コントローラ部51の時計回路12の時刻を読み出し表示する(ステップST14)。使用開始日表示器4、稼働期間表示器5、及び交換周期表示器6の使用開始日、稼働期間、及び交換周期の表示は、部品選択スイッチ7により現在選択されている部品を認識しておき(ステップST15)、該当部品の内容をメモリ17より読み出すことによって行われる(ステップST16)。

【0024】実施例2. なお、上記実施例1の表示パネル53では、LEDの表示器1、2、英数字LEDの表示器3～6、スイッチ7～10を用いて構成したが、本実施例2では、図6に示すように液晶タッチパネルディスプレイ装置61を用いて構成するようにしてもよく、これにより更に小形化することができ、上記実施例1と同様の効果を奏する。

【0025】実施例3. また、上記実施例1、2では、プロセスコントローラのライフパネル部まで運転員が行って部品の寿命確認を行わなければいけなかったが、ライフパネル部で記憶している各部品の寿命データを、図7に示すようにシステムバス71経由で上位マンマシン監視装置18に各プロセスコントローラP1～Pnの寿命部品状態を表示させたり、電話回線74を利用して運転員が常駐している場所の電話機72やFAX(ファクシミリ)19を自動的に鳴らし寿命がきたことを通報するようにしたので、遠隔地にいながらプロセスコントローラP1～Pnの寿命部品の監視が行えるようになる。又、プロセスコントローラP1～Pnのプログラム作成ツール20にも通信インタフェース75経由で寿命表示するようにしたので、プロセスコントローラP1～Pnの調整をしながらでも監視することができる。

【0026】実施例4. 更に、上記実施例1、2、3では、寿命表示だけであったが、本実施例4のように上位マンマシン監視装置やプログラム作成ツールに接続されるプリンタに過去の部品交換履歴をリストアウトすれば、ドキュメントとして残せることができる。

【0027】図8はこの発明の実施例4に係るプロセスコントローラを含むシステムの構成を示すブロック図で

ある。図8において、図1に示す構成要素に相当するものには同一の符号を付し、その説明を省略する。図8において、プロセスコントローラPのコントローラ部51は、実施例1と同様、CPU11、時計回路12、通信インタフェース13の他に、ライフパネル部52で生成された部品寿命データを蓄える部品交換履歴ファイル23、上位マンマシン監視装置18とのインタフェースを司るシステムバスインタフェース82、電話機92やファクシミリ93を接続した電話回線95とのインタフェースを司る電話回線インタフェース81、及びプログラム作成ツール20とのインタフェースを司るプログラム作成ツールインタフェース83を備えている。上位マンマシン監視装置18は、コントローラ部51とのインタフェースを司るシステムバスインタフェース84、コントローラ部51から送られてきた部品寿命データを蓄える部品交換履歴ファイル24、CRT90とのインタフェースを司るCRTインタフェース86、キーボード91とのインタフェースを司るキーボードインタフェース87、プリンタ21とのインタフェースを司るプリンタインタフェース88、及び上記構成要素を制御するCPU85を備えている。上位マンマシン監視装置18とコントローラ部51とはシステムバス94で接続されている。プログラム作成ツール20にはプリンタ22が接続されている。

【0028】次に動作について説明する。ライフパネル部52にて部品交換された内容は、その都度、通信インタフェース14、通信線111、及び通信インタフェース13を経由してコントローラ部51内の部品交換履歴ファイル23に例えば図9に示すような部品交換履歴リストとして蓄えられる。また、上位マンマシン監視装置18の部品交換履歴ファイル24にも、システムバスインタフェース82、システムバス94、及びシステムバスインタフェース84を経由して部品寿命データが部品交換履歴リストとして蓄えられる。コントローラ部51の部品交換履歴ファイル23に蓄えられた部品寿命データをプログラム作成ツール20に送ると、プリンタ22により部品交換履歴リストを印字出力できる。また、その部品寿命データを電話機92に送ると、警報を発生させることができたり、その部品寿命データをファクシミリ93に送ると、その部品交換履歴リストを印字出力できる。また、上位マンマシン監視装置18の部品交換履歴ファイル24に蓄えられた部品寿命データをプリンタ21に送ると、その部品交換履歴リストを印字出力できる。更に、部品交換履歴ファイル24の内容をCRT90に表示できるので、キーボード91の操作により、その内容を修正できる。本実施例4のように部品交換履歴リストを自動生成できるので、運転員の保守点検が容易になり時間短縮される。

【0029】

【発明の効果】以上のように第1の発明によれば、寿命

を有する構成部品の使用開始日や交換周期を設定できる設定手段と、上記使用開始日から現在に至るまでの稼働期間を計算する計算手段と、上記稼働期間が上記交換周期を過ぎると警告信号を出力する警告信号出力手段と、上記使用開始日や上記稼働期間や上記交換周期等の部品寿命データを表示する部品寿命データ表示手段とを備えて構成したので、プロセスコントローラの寿命部品の交換時期を自動的に知らせることができ、また、寿命部品の交換時期を容易に確認することができ、これにより故障を未然に防止できるという効果が得られる。また、保守点検作業の簡略化及び時間短縮が図れるという効果が得られる。

【0030】第2の発明によれば、制御対象を制御するプロセスコントローラと上位マンマシン監視装置とを接続し、上記プロセスコントローラにおいて生成された部品寿命データを上記上位マンマシン監視装置でも監視可能にしたので、中央監視室にいないがプロセスコントローラの寿命部品の交換時期を監視することができ、これにより故障を未然に防止でき、保守点検作業の簡略化及び時間短縮が図れるという効果が得られる。

【0031】第3の発明によれば、制御対象を制御するプロセスコントローラと電話回線とを接続し、上記プロセスコントローラにおいて生成された部品寿命データを電話機やファクシミリでも監視可能にしたので、遠隔地にいないがプロセスコントローラの寿命部品の交換時期を監視することができ、これにより故障を未然に防止でき、保守点検作業の簡略化及び時間短縮が図れるという効果が得られる。

【0032】第4の発明によれば、制御対象を制御するプロセスコントローラとプログラム作成ツールとを接続し、上記プロセスコントローラにおいて生成された部品寿命データを上記プログラム作成ツールでも監視可能にしたので、プロセスコントローラを調節しながら寿命部品の交換時期を監視することができ、これにより故障を未然に防止でき、保守点検作業の簡略化及び時間短縮が図れるという効果が得られる。

【0033】第5の発明によれば、第1の発明を構成する設定手段、計算手段、警告信号出力手段、部品寿命データ表示手段の他に、部品寿命データを蓄える部品交換履歴リストファイルも備えて構成したので、第1の発明と同様な効果が得られるとともに、部品交換履歴リストも出力することが可能となり、保守点検作業を更に容易に短時間で与えるという効果も得られる。

【図面の簡単な説明】

【図1】 この発明の実施例1に係るプロセスコントローラの構成を示すブロック図である。

【図2】 実施例1における表示パネルを示す図である。

【図3】 実施例1における寿命警告出力処理を示すフローチャートである。

【図4】 実施例1における設定変更処理を示すフローチャートである。

【図5】 実施例1におけるパネル表示処理を示すフローチャートである。

【図6】 この発明の実施例2における液晶タッチパネルディスプレイ装置の外観図である。

【図7】 この発明の実施例3に係るプロセスコントローラを含むシステムの構成図である。

【図8】 この発明の実施例4に係るプロセスコントローラを含むシステムの構成を示すブロック図である。

【図9】 実施例4における部品交換履歴リストを示す図である。

【図10】 従来のプロセスコントローラのモニターパネルを示す図である。


【図11】 従来のプロセスコントローラの概略斜視図である。

【符号の説明】

1 部品選択表示器、2 部品寿命警告表示器、3 現在日表示器、4 使用開始日表示器（部品寿命データ表示手段）、5 稼働期間表示器（部品寿命データ表示手段）、6 交換周期表示器（部品寿命データ表示手段）、7 部品選択スイッチ、8 設定項目選択スイッチ、9 設定スイッチ、10 設定データ変更スイッチ、15a 計算手段、15b 警告信号出力手段、111 通信線


段）、7 部品選択スイッチ、8 設定項目選択スイッチ、9 設定スイッチ（設定手段）、10 設定データ変更スイッチ、11、15、85 CPU、12 時計回路、13、14、75 通信インタフェース、16 プログラムROM、17 メモリ、18 上位マシン監視装置、20 プログラム作成ツール、21、22 プリンタ、23、24 部品交換履歴ファイル、25 重故障LED表示器、26 軽故障LED表示器、27 CPU電源LED表示器、28 IO電源LED表示器、29 バッテリ低下LED表示器、30 重故障ロジック図、31 軽故障ロジック図、51 コントローラ部、52 ライフパネル部、53 表示パネル、61 液晶タッチパネルディスプレイ装置、P、P1、Pn プロセスコントローラ、71、94 システムバス、72、92 電話機、73、93 ファクシミリ、74 電話回線、81 電話回線インタフェース、82、84 システムバスインタフェース、83 プログラム作成ツールインタフェース、86 CRTインタフェース、87 キーボードインタフェース、88 プリントインタフェース、90 CRT、91 キーボード、111 通信線。

【図1】

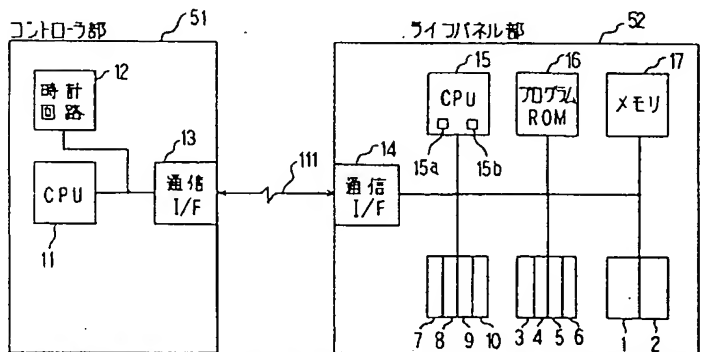


1: 部品選択表示器、2: 部品寿命警告表示器、3: 現在日表示器、4: 使用開始日表示器、5: 稼働期間表示器、6: 交換周期表示器、7: 部品選択スイッチ、8: 設定項目選択スイッチ、9: 設定スイッチ、10: 設定データ変更スイッチ、15a: 計算手段、15b: 警告信号出力手段、111: 通信線


【図5】

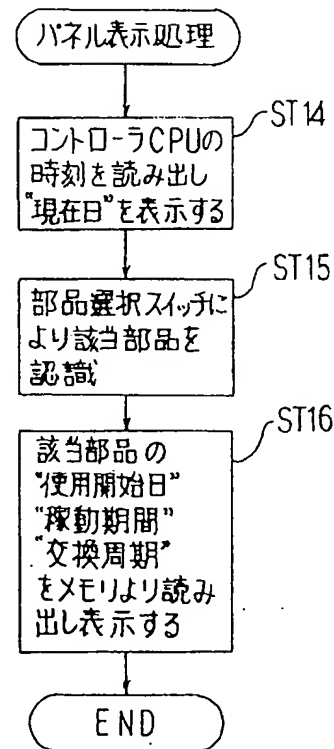


【図11】



【図2】

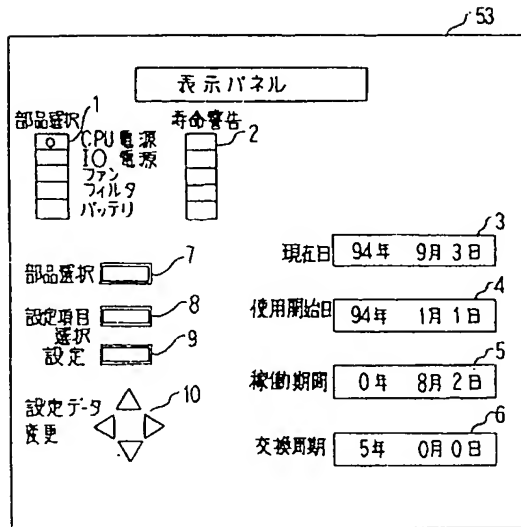


【図6】

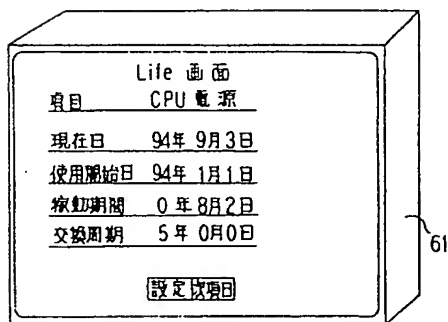


液晶タッチパネルディスプレイ装置


【図3】

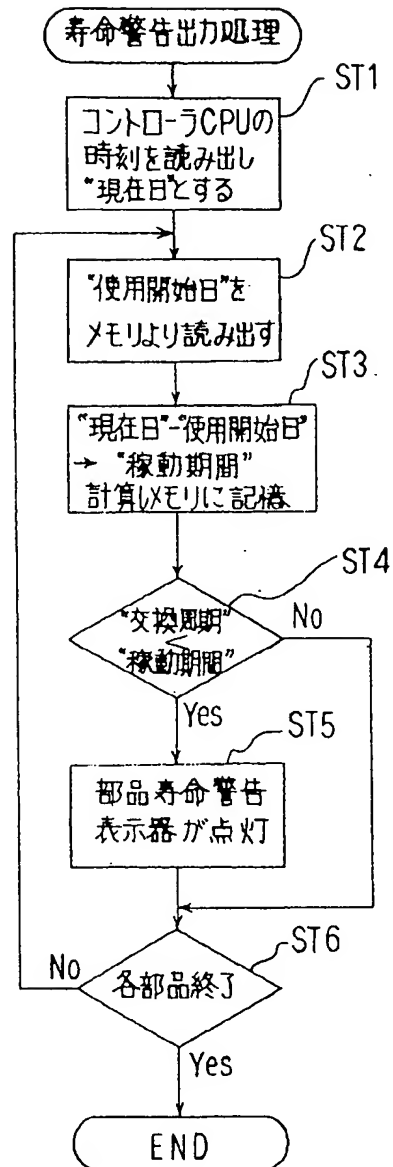


【図4】

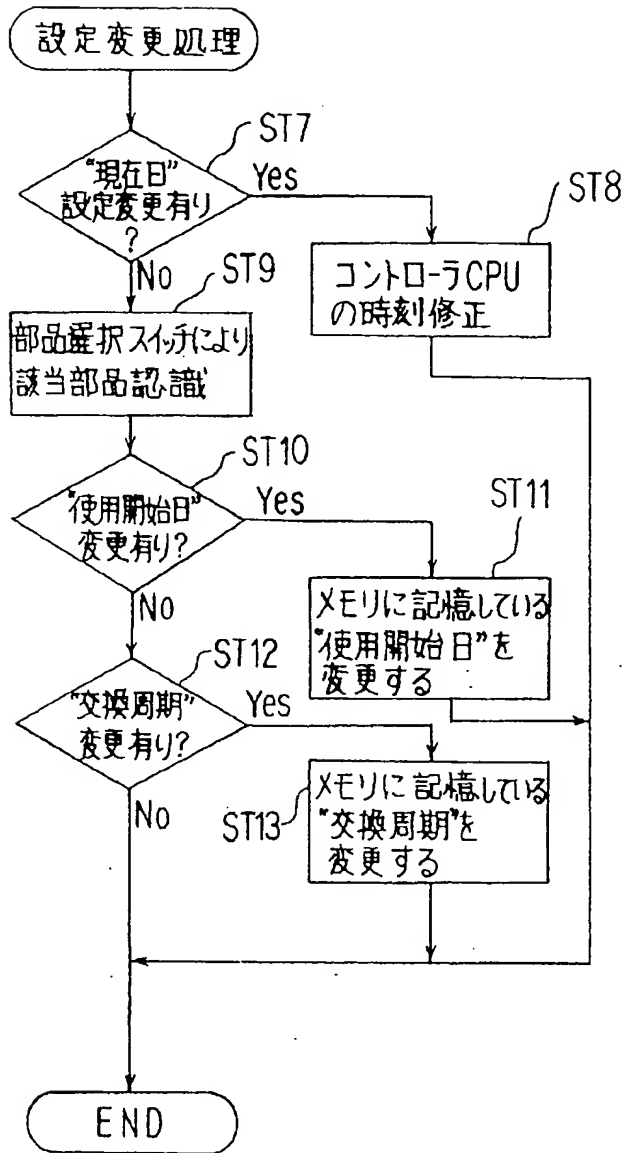

【図10】

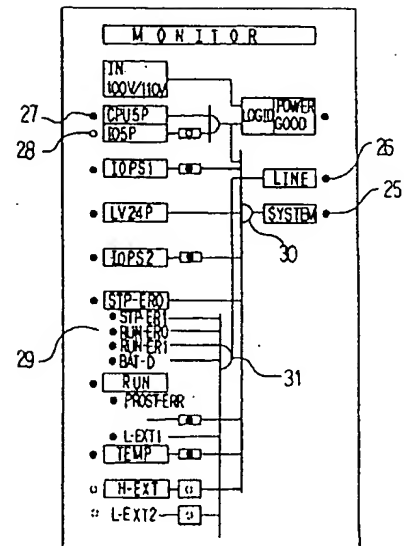


【図7】

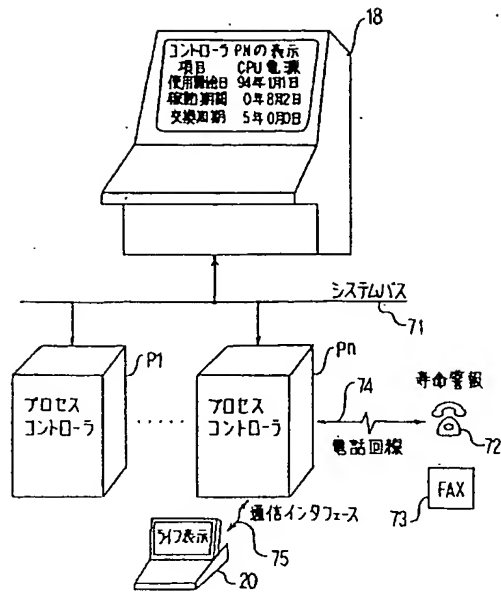

18: 上位マシン監視装置

20: プログラム作成ツール

【図8】

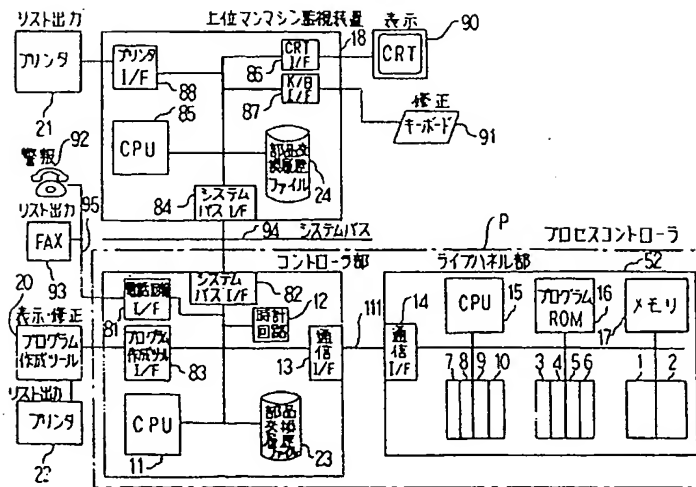

【図9】

カピコンロープ					
部品交換履歴リスト					
作成 照査 検認					
交換日	寿命部品				
	CPU電源	IO電源	ファン	フィルター	バッテリー
89年4月1日	-	-	-	-	1
90年4月5日	-	-	1	1	2
91年4月15日	-	-	-	-	3
92年4月13日	-	-	2	2	4
93年4月2日	1	1	-	-	5
94年4月17日	-	-	3	3	6

* 表中の数値は交換した回数の積算値、-は交換していないことを示す

フロントページの続き

(51) Int. Cl. 6

識別記号

庁内整理番号

F I

技術表示箇所

G 0 6 F 17/60